

IP66

全密閉式 變頻器

Water Proof Frequency Inverter




• WP5規格表/Specification

Series No.(WP5)	2001/2	2001	2002	4001	4002	4003
最大適用馬達(HP/KW) Rated power of motor	0.5/0.4	1/0.75	2/1.5	1/0.75	2/1.5	3/2.2
連續輸出容量(KVA) Rated continuous output power	1.1	1.5	2.7	1.9	3	3.8
連續輸出電流(A) Rated continuous output current	3	4	7	2.5	4	5
額定輸出電壓 Rated output voltage	3PH 200-240V			3PH 380-480V		
頻率輸出範圍 Range of output frequency	0.1-400 Hz					
輸入電源 (PH, V, Hz) Power source	1PH/3PH , 200-240V , 50/60 Hz			3PH , 380-480V , 50/60 Hz		
容許電壓變動 Tolerance of power source voltage	176-264V , 50/60 Hz			332-528V , 50/60 Hz		
容許頻率變動 Tolerance of frequency fluctuation	± 5%					
過負載容量 Overload current	150% of rated current for 1 min					
保護等級 Enclosure	IP 66					
環境溫度 Ambient temperature	-10 °C (14 °F) ~ + 40 °C (104 °F)					
EMC filter	Option					

- 當訂購EMC filter (200V)時，請註明電源輸入為單相或三相。
When you select the EMC filter (200V), please specify the power source (Will be single-phase or 3-phase).
- Built-in brake transistor

• 尺寸圖(Dimension) : [mm]

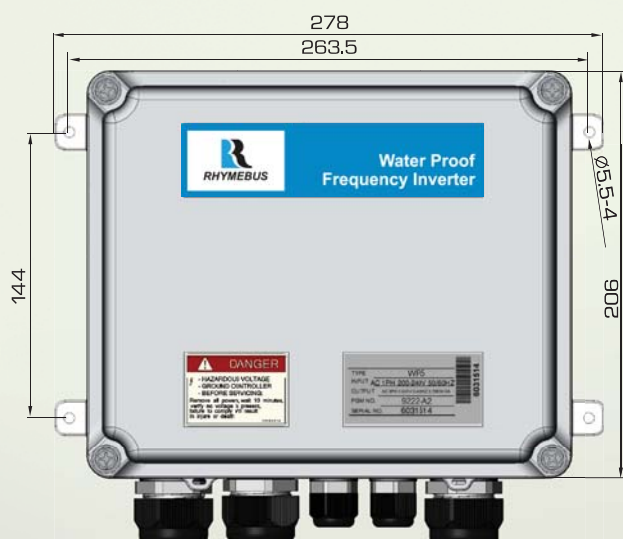

WP5 - 2 001 - 1PH

- 1PH : Single-phase
- None : 3-phase
- 001 : Rated power (1 HP)
- 2 : Indicate 200~240V
- 4 : Indicate 380~480V
- Series Type : Water Proof

