


10 GA. CAPACITY

6135 SERIES

STANDARD FEATURES

- Shear capacity up to 80,000 tensile and 44,000 yield strength.
- Pendant control c/w on/off buttons, mode selector switch, and stroke control dial.
- Backgauge control includes LED display, inch or metric conversion, go-to-position function, 99 pre-select programs, hour meter and stroke counter.
- 36" backgauge travel with automatic swing up backstop at full extension.
- 4-edged blades, top and bottom, modified high carbon, high chrome.
- 3 position footswitch control.
- 4' squaring arm c/w steel rule with 1/16" and 1 mm increments.
- Shadow light and line.
- Hand slots in table.
- Drilled and tapped holes in front of table.

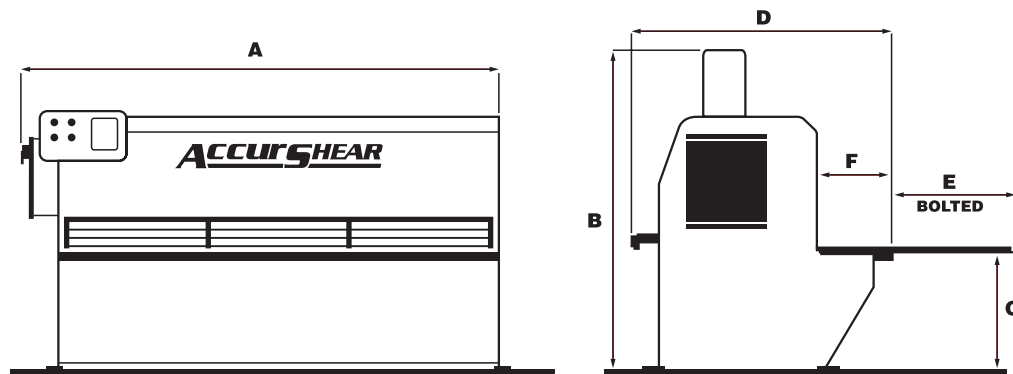

Model Number	Capacity Inches	Length Feet	Knife Size Inches	Number Of Hold Downs	Hold-down Tonnage	Cycles Per minute Full Stroke	Cycles Per minute Short Stroke	High Speed Full Stroke	High Speed Short Stroke	Motor H.P.	Overall Dimensions						Approx. Weight Lbs.
											A	B	C	D	E	F	
61356	10 ga	6	1x3x76	10	10	40	65	n/a	n/a	10	98	80	32	81	25	18	9,000
61358	10 ga	8	1x3x100	13	13	35	60	n/a	n/a	10	122	80	32	83	23	20	11,000
613510	10 ga	10	1x3x124	16	16	30	55	n/a	n/a	10	146	80	32	84	22	21	14,000
613512	10 ga	12	1x3x148	19	19	25	45	n/a	n/a	10	170	80	32	86	21	22	17,000
613514	10 ga	14	1x3x172	22	22	20	40	n/a	n/a	10	193	80	32	88	18	24	20,000


Specifications are subject to change without notice. Capacities are based on 80,000 tensile/44,000 yield strength steel.

1/4" CAPACITY

6250 SERIES

STANDARD FEATURES

- Shear capacity up to 80,000 tensile and 44,000 yield strength.
- Pendant control c/w on/off buttons, mode selector switch, and stroke control dial.
- Backgauge control includes LED display, inch or metric conversion, go-to-position function, 99 pre-select programs, hour meter and stroke counter.
- 36" backgauge travel with automatic swing up backstop at full extension.
- 4-edged blades, top and bottom, modified high carbon, high chrome.
- 3 position footswitch control.
- 4' squaring arm c/w steel rule with 1/16" and 1 mm increments.
- Manual quick blade clearance adjustment.
- Hand slots in table.
- T-slot in front of table.
- Shadow light and line.
- Oil cooler.

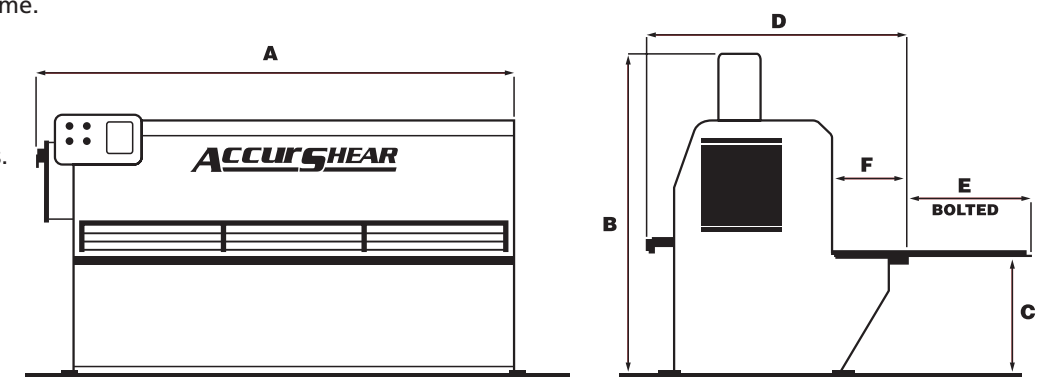

Model Number	Capacity Inches	Length Feet	Knife Size Inches	Number Of Hold Downs	Hold-down Tonnage	Cycles Per minute Full Stroke	Cycles Per minute Short Stroke	High Speed Full Stroke	High Speed Short Stroke	Motor H.P.	Overall Dimensions						Approx. Weight Lbs.
											A	B	C	D	E	F	
62506	1/4	6	1x3x76	10	10	30	55	46	65	20	99	83	32	82	25	18	11,000
62508	1/4	8	1x3x100	13	13	26	50	42	65	20	123	83	32	84	23	20	14,000
625010	1/4	10	1x3x124	16	16	23	48	38	60	20	147	83	32	85	21	22	17,000
625012	1/4	12	1x3x148	19	19	20	46	32	60	20	171	83	32	87	20	23	21,000
625014	1/4	14	1x3x172	22	22	17	42	26	55	20	195	89	33	90	18	25	32,000
625016	1/4	16	1x3x196	25	25	14	38	21	55	20	219	89	33	92	15	28	38,000
625018	1/4	18	1x3x220	28	28	13	34	19	55	20	243	94	33	94	13	30	48,000
625020	1/4	20	1x3x244	31	31	12	30	17	50	20	267	94	33	96	11	32	57,000

Specifications are subject to change without notice. Capacities are based on 80,000 tensile/44,000 yield strength steel.