
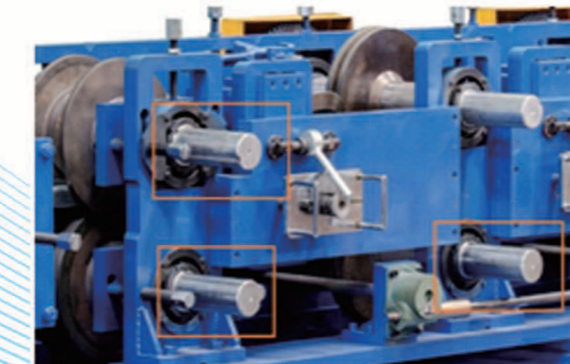


C&Z Purlin Roll Forming Machine

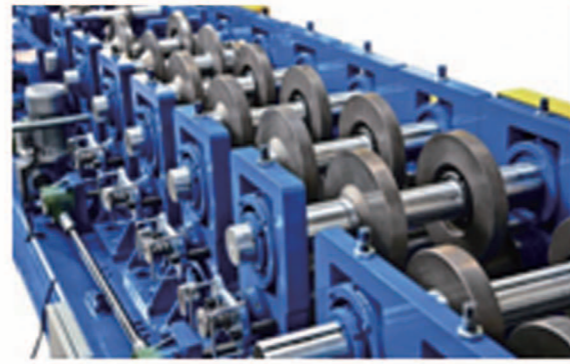

C purlin: C120-300
 Material: Cold rolled coil, Galvanized coil, Hot rolled coil
 Thickness: 1.5-3.0mm
 Width: 120-300mm
 Flange: 40-80mm
 Lip: 10-25mm

Z purlin: Z120-300
 Material: Cold rolled coil, Galvanized coil, Hot rolled coil
 Thickness: 1.5-3.0mm
 Width: 120-300mm
 Flange: 40-80mm
 Lip: 10-25mm

QC11Y(K) Series (CNC) Hydraulic Shearing Machine



Features:

1. Machine frame and blade frame are welded structure, vibration to eliminate stress, can maintain good accuracy.
2. Series cylinder structure, good synchronization performance, and can adjust the angle of shear, and the shearing quality is very high.
3. Adopting the three-point support rolling clamping rail, to maintain good accuracy, the blade frame running smoothly, and can quickly adjust the blade gap.
4. The blade frame's stroke can adjust stepless, in order to improve production efficiency.
5. Back gauge device moves quickly and locates accurately.
6. It has guillotine type and swing type; CNC System can use DA41, DA52, DA65, E20, E200 and ect.

Specifications:

Parameter	Max. Shearing Thickness(m)	Max. Shearing width (mm)	Shearing Angle(°)	Throat Depth	Strokes (Times/min)	Back Gauge Range	Main Motor Power
4x2500	4	2500	0.5-1.5	120	14-30	600	5.5
4x3200	4	3200	0.5-2.5	120	12-35	600	5.5
4x4000	4	4000	0.5-2	120	8-20	600	7.5
4x5000	4	5000	0.5-1.5	120	8-20	600	7.5
6x2500	6	2500	0.5-2.5	120	10-30	600	7.5
6x3200	6	3200	0.5-2.5	120	10-10	600	7.5
6x4000	6	4000	0.5-2	120	10-20	600	11
8x2500	8	2500	0.5-2.5	120	10-20	600	11
8x3200	8	3200	0.5-2.5	120	12-25	600	11
8x4000	8	4000	0.5-2.5	120	12-20	600	15
8x5000	8	5000	0.5-2.5	120	12-20	600	15
10x4000	10	4000	0.5-2	120	7-20	750	15
10x8000	10	5000	0.5-2	120	7-20	750	37
12x2500	12	2500	0.5-2.5	120	9-30	700	15
12x3200	12	3200	0.5-2.5	120	7-35	750	15
12x4000	12	4000	0.5-2	120	10-20	750	22
12x6000	12	6000	0.5-2.5	120	7-20	750	30
12x8000	12	8000	0.5-2.5	120	10-30	750	60
16x2500	16	2500	0.5-3	120	7-25	700	22
16x3200	16	3200	0.5-3	120	7-25	700	22
16x4000	16	4000	0.5-2.5	120	7-25	700	30
16x6000	16	6000	0.5-2.5	120	7-25	700	37
16x8000	16	8000	0.5-2.5	120	7-25	700	60
20x2500	20	2500	0.5-3	120	5-25	750	30
20x3200	20	3200	0.5-3	120	5-25	750	30
20x4000	20	4000	0.5-3	120	5-20	750	30
25x2500	25	2500	0.5-3.5	120	5-25	750	30
25x3200	25	3200	0.5-2.5	120	5-25	750	30
30x2500	30	2500	1-3.5	120	5-15	750	55
30x3200	30	3200	0.5-2.5	120	5-15	750	55
40x2500	40	2500	2-4	120	4-15	700	55