

REMIX550

**Troncatrice doppia
testa ascendente
per tagli piramidali**



PRODUCE SOLUZIONI




Mepal *Italia*



Left and right heads at 22,5° inwards



Left and right heads at 30° outwards

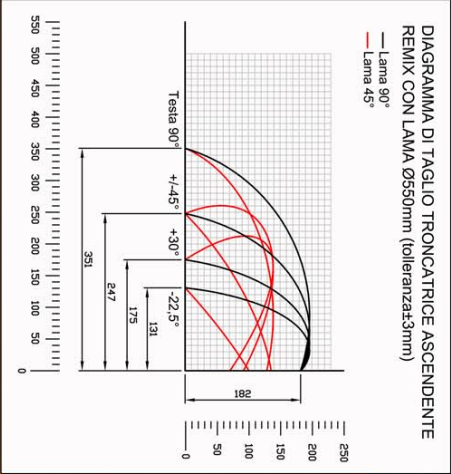


OPTIONAL ACCESSORIES:
Micro-drop lubrication with pure oil
UPS (220V – 50Hz – 250VA)
20 l cutting oil
Intermediate profile support

STANDARD ACCESSORIES:
No.2 Widia Ø550 mm blades
Spray mist lubrication

TECHNICAL DATA:
Ø560 mm Widia upcat saw
Blade motors 400 V (3 kw) - 50/60 Hz.
Blade rotation speed 2800 rpm.
Heads rotation from 90° to 22,5°
inwards and from 90° to 30° outwards.
Intermediate angles displayed on a screen.
Blades tilting from 90° to 45° inwards and
intermediate tilting.
Carriage (X axis) movement with a brushless
motor. Max speed 20 m/min.
Blade movements with hydropneumatic cylinder
(adjustable rising speed/quick return)
2,5 m rolling table with vertical rollers
Operating pressure: 7 bar

**EQUIPPED WITH TOUCHSCREEN 12" CNC
ABLE TO:**
Manage single cuts
Save till 99 profile codes with their data
Save and use cutting lists through USB drive
Manage windows and doors macro
Use over-length software
Use under-length software

REMIX550



Ingombro - Overall dimensions - Abmessungen - Dimensions - Encombrement - Peso - Weight - Gewicht - Poids			
L	W	H	
4000	5910	1930	
5000	6910	1930	
		1700	Kg 2150
		1700	Kg 2335

