# HEM Vertical: VT100HLA-60-TS

**Capacity:** 18″ w x 20.75″ h @ 90° • 18″ w x 14.25″ h @ 45° L • 18″ w x 14″ h @ 45° R
18″ w x 9.75″ h @ 60° L • 18″ w x 6.75″ h @ 60° R • **Blade:** 1-1/4″ x 15’6″ x .042″ • **Arm Cant:** 4°*
**Bar-Feed:** 0-48” (Multiple Indexes) • **Motor:** 5 HP • **Hydraulics:** 2 HP

**Capacity increases slightly with Blade Cant Removed*

**Shown with Optional Top Clamp, 2nd Vise, & 3rd Vise*

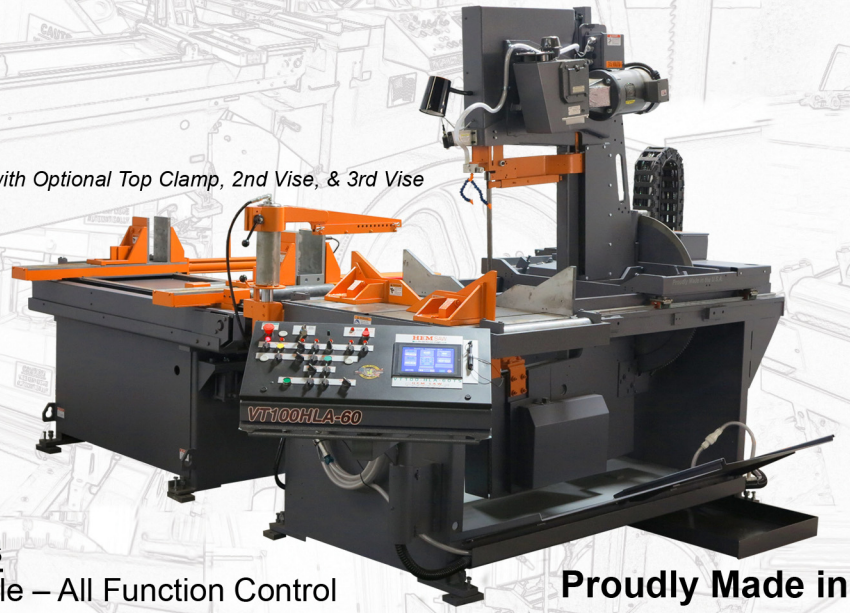


## Standard Features

Swing-Away Console – All Function Control
Touch Screen (Flat Panel Touch Control)
Solid State Programmable Logic Controller
Computer Controlled Feed System
Powered Programmable Tilt w/ Angle Readout
Adjustable Blade Speed w/ LED Readout
Powered Blade Tension
Blade Brush
Carbide Blade Guides
Cut Watcher System
Full Stroking Main & Feed Vise
Adjustable Clamping Force
Powered Guide Arm
Electronic Controlled Traverse
Idle Base Rollers – 1 Each Side of Base
Flood Coolant System w/ Wash-Down Hose
Boltable Side Wings for Coolant Drainage
Out of Stock & Broken Blade Indicators
Safety Lockout Key & Safety Guards

220V/440V/3PH Electrical Motor Requirement

**Proudly Made in the U.S.A.**

## Optional Features

Reduced Capacity Top Clamp – Feed Vise
Reduced Capacity Top Clamp – Main Vise
Full Capacity Top Clamp – Feed Vise
Swing-Away Top Clamp – Main Vise
2nd Main Vise
3rd Holding Vise on Feed
Laser Light System
Power Raised Lift Up Rollers
Spray Mist Lubrication
Auto Lift Table - Table Lifts in Automatic Mode
0-72″ Stroke Bar-Feed – All Rollers w/ 3rd Vise

H&M® SAW
*The saw that cuts straight.*

**www.hemsaw.com**

**Address:** P.O. Box 1148 Pryor OK 74361 • **Toll Free:** 888-729-7787 • **Email:** info@hemsaw.com

HEM, Inc., whose policy is one of continuous improvement, reserves the right to change the price, specifications, or design, as well as discontinue any model, at any time without notice and without incurring any obligations. Dimensions may vary. Please contact HEM, Inc. for a certified dimensional drawing of your specific model.
Copyright 112800 HEM, Inc. All rights reserved.