


APT[®] INDUSTRIAL BELTS



Ashutosh Power TransBelts Ltd.

Timing Belt Sleeves

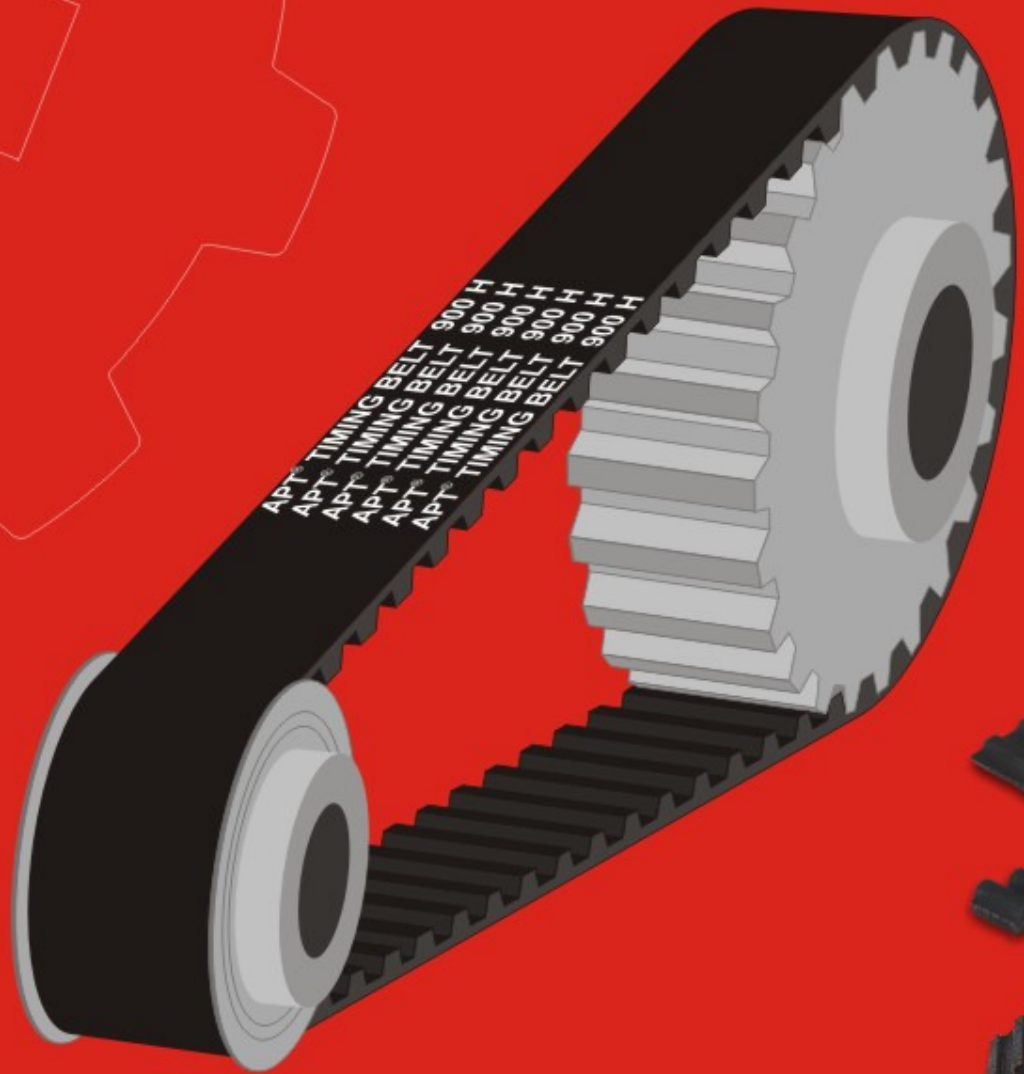

Timing Belt Cut Pieces



Double Sided Timing Belts



Open End Timing Belts



Timing Pulleys



Special Timing Belts





Contents

ASHUTOSH

01. Introduction	01
02. Timing Belts	03
03. Double Sided Timing Belts	05
04. PU Open Ended (M) Timing Belts	06
05. PU Welded Endless & Flex Timing Belts	08
06. Timing Pulley	09
07. Rubber Transmission Belts	10
08. Lifting Tapes	12
09. PU Round Belts	13
10. PU V Belts	14
11. Variable Speed Belts	17
12. Seamless Flat Belts	18
13. Poly Flex Belts	19
14. Nylon Sandwich Belts	20
15. PVC Conveyor Belts	21
16. Special Backing	22
17. Special Designs	23
18. Accessories	24
19. Timing Belts Sizes	25
(Y1 - Y5, B1 - B6, P1 - P4, G1 - G3, V1, O1 - O2 page 25-45)	
20. Timing Belt Drive Selection Form	46
21. Notes	47

APT[®]



Introduction

ASHUTOSH



Ashutosh Power TransBelts Limited is the Promoter Company of the APT GROUP, which is engaged in the Manufacture, Supply and Export of Industrial Power Transmission Belts & Pulleys. Originally founded in 1983 by Mr. Deenbandhu Reengusia as a Firm in the name of Ashutosh Texmach Manufacturers, his vision and efforts quickly led to the formation of the APT Group comprising of companies & Firms engaged in providing professional services to the Industries in various sectors. By 1990, the Group had nearly 5 fully operational divisions providing services to different sectors of the Industry.

OUR MISSION IS TO KEEP EVERY MACHINE IN THE INDUSTRY RUNNING UNDER ALL POSSIBLE CIRCUMSTANCES. We believe our progress is directly related to the growth and progress of the industries. We put our best efforts to see that no machine is left idle for the want of a belt or pulley. Our Quality Department is always striving hard to manufacture goods that reduce breakdown time.

Innovation is the key to our success. We always strive to manufacture better quality products. We are always keen to develop any new belt / pulley as per the design, specifications and requirements of our Customers especially OEM.

Ashutosh Power TransBelts Limited was incorporated with a commitment to offer innovative and superior quality products to meet the most challenging requirements of today as well as the future.

Our commitments

- To Excel in the products we introduce in the market and serve the industry.
- To Provide Professional Support to our customers with high precision Timing belts, Timing pulleys and Accessories.
- To provide APPROPRIATE BELTS & PULLEYS for various needs and applications such as Conveyor Drive, Linear Drive, Power Transmission Drive, or a combination of any of these drive systems, etc.
- To put continuous efforts into innovation and development of products to meet customer requirements
- To provide customers with highest engineering support to meet their requirements and expectations in relation to selection and conversion of drive systems.
- To employ such staff that is dedicated to meet the highest expectations of our customers.

Our Main Products include

- TIMING BELTS
- TIMING PULLEYS
- SPECIAL TIMING BELTS
- CONVERSION TO / SELECTION OF TIMING BELT DRIVE SYSTEM
- NORMAL DRIVE BELTS
- CONVEYOR BELTS
- ACCESSORIES

APT[®]





APT® Timing Belts


ASHUTOSH

T Type Inch Pitch


All Dimensions in MM

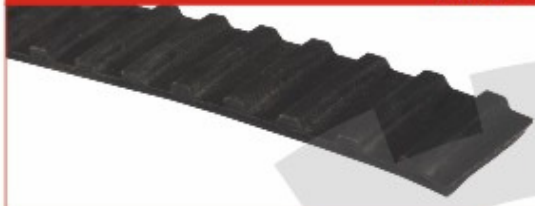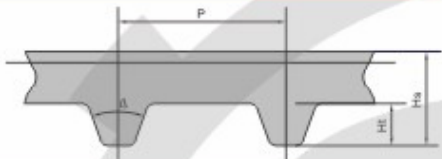MXL - XL - L - H - XH - XXH						
 	Type	P	H _t	H _s	Angle	Details Page
	MXL	2.032	0.51	1.14	40°	
	XL	5.080	1.27	2.30	50°	
	L	9.525	1.91	3.60	40°	
	H	12.70	2.29	4.30	40°	
	XXH	31.750	9.53	15.70	40°	

ARC Type Metric Pitch

HTD 2M - 3M - 5M - 8M - 14M - 20M					
 	Type	P	H _t	H _s	Details Page
	HTD 2M	2	0.75	1.36	
	HTD 3M	3	1.17	2.4	
	HTD 5M	5	2.06	3.8	
	HTD 8M	8	3.36	6.0	
	HTD 14M	14	6.02	10.0	
	HTD 20M	20	8.4	13.20	

ARC Type Metric Pitch

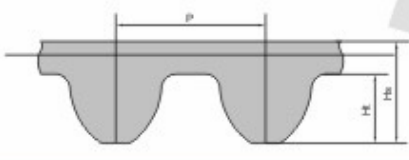STS S2M - S3M - S4.5 - S5M - S8M - S14M					
 	Type	P	H _t	H _s	Details Page
	S 2M	2	0.76	1.36	
	S 3M	3	1.14	2.20	
	S 4.5	4.5	1.71	2.81	
	S 5M	5	1.91	3.4	
	S 8M	8	3.05	5.3	
	S 14M	14	5.3	10.2	

APT®




APT® Timing Belts

ASHUTOSH


ARC Type Metric Pitch

All Dimensions in MM

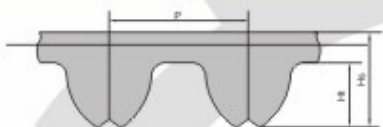RPP 2M - RPP 3M - RPP 5M - RPP 8M - RPP 14M					
 	Type	P	H _t	H _s	Details Page No.
	RPP 2M	2	0.76	1.36	
	RPP 3M	3	1.15	1.9	
	RPP 5M	5	1.95	3.5	
	RPP 8M	8	3.2	5.5	
	RPP 14M	14	6	10	


T Type Metric Pitch

T2.5 - T5 - T10 - T20

 	Type	P	H _t	H _s	Angle	Details Page No.
	T2.5	2.5	0.7	1.3	40°	
	T5	5	1.2	2.2	40°	
	T10	10	2.5	4.5	40°	
	T20	20	5	8	40°	

T Type Metric Pitch

AT5 - AT10 - AT20

 	Type	P	H _t	H _s	Angle	Details Page No.
	AT5	5	1.2	2.7	50°	
	AT10	10	2.5	5	50°	
	AT20	20	5	8	50°	

Ordering Examples :

T Type Inch Pitch

140 XL 050
 Width 0.5 inch (12.7mm)
 Pitch (0.2 inch)
 Length 14.0 inches

T Type Metric Pitch

32 T10 1210
 Length 1210 mm
 Pitch 10 mm
 Width 32 mm

ARC Type Metric Pitch

300 S8M 1400
 Length 1400 mm
 Pitch 8 mm
 Width 30 mm


Note : Also available in PU with Steel Wire / Kevlar cord

APT®




APT® Double Sided Timing Belts

ASHUTOSH

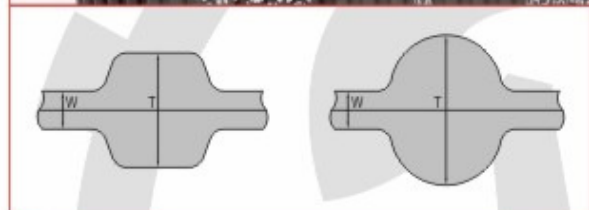


DA Type

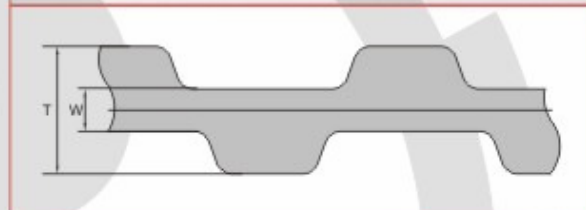

DB Type

Ordering Examples :


T Type Inch Pitch



T Type Metric Pitch



ARC Type Metric Pitch



Dimension of APT® Double Sided Timing Belts

Type	Size	Teeth No.
DXL	180XL~1970XL	90~985
DL	187L~1988L	50~530
DH	240H~2500H	48~500
DXH	700XH~2275XH	80~260
DT5	T5x500~T5x7000	100~1400
DT10	T10x500~T10x7050	50~705
AT10 DL	AT10x500~AT10x7000	50~700
D3M	501-3M~5010-3M	167~1670
D5M	500-5M~7000-5M	100~1400
D8M	512-8M~6880-8M	64~860
D14M	1750-14M~6860-14M	125~490
DS5M	S5M-435~S5M-7000	87~1400
DS8M	S8M-512~S8M-6880	64~860

Note : We can manufacture belt as per customer specification and drawing.



APT®



APT® PU Open Ended (M) Timing Belts

ASHUTOSH

All Dimensions in MM

XL - L - H - XH						
	Type	P	H	H _t	W	Ø
	XL	5.08	2.3	1.27	1.37	50°
	L	9.525	3.6	1.9	3.2	40°
	H	12.7	4.36	2.29	4.4	40°
XH	22.225	11.2	6.35	7.94	40°	
HTD5M- HTD8M- HTD14M						
	Type	P	H	H _t		
	HTD 5M	5	3.7	2.2		
	HTD 8M	8	5.6	3.6		
	HTD 14M	14	10.0	6.43		
STS - S5M - S8M - S14M						
	Type	P	H	H _t		
	S5M	5	3.4	1.91		
	S8M	8	5.1	3.05		
	S14M	14	10.0	5.3		
RPP5M - RPP8M - RPP14M (PAZ)						
	Type	P	H	H _t		
	RPP 5M	5	3.8	2.0		
	RPP 8M	8	5.4	3.2		
	RPP 14M	14	10.0	6.0		
T5- T10- T20						
	Type	P	H	H _t	W	
	T5	5	2.2	1.2	1.8	
	T10	10	4.5	2.5	3.8	
	T20	20	8.0	5.0	6.5	

APT®



APT® PU Open Ended (M) Timing Belts

ASHUTOSH

All Dimensions in MM

AT5- AT10- AT20					
	Type	P	H	H _t	W
	AT5	5	2.7	1.2	2.5
	AT10	10	4.5	2.5	5.0
	AT20	20	8.0	5.0	10.0

P1 - P2 - P4		
Type	H	
P1	1.0	
P2	2.0	
P4	4.0	

TG5 - TG10 - TG20 - ATG10 - ATG20 - HG						
	Type	P	H	H _t	B	h
	TG5	5	2.2	1.2	6	4
	TG10K6	10	4.5	2.5	6	4
	TG10K13	10	4.5	2.5	13	6.5
	TG20	20	8.0	5.0	13	6.5
	ATG10	10.0	4.5	2.5	13	6.5
	ATG20	20	8.0	5.0	13	6.5
	HG K13	12.7	4.3	2.29	13	6.5



Ordering Examples

APT® Timing Belts 25 / AT 10 / 2 500 / M / Steel / PAZ
 APT® Timing Belts 25 / AT 10 / 2 500 / V / Steel / Supergrip
 APT® Flex 25 / AT 10 / 2 500 / A fx / Steel / PUR

Width (mm) _____

Pitch _____

Length (mm) _____

Open length (M) _____

Welded endless (V) _____

Truly endless (Afx) _____

Tensile members _____

Backing (optional) _____

Tolerances of open ended timing belts : (Width) : ± 0.5mm (Height) : ± 0.2mm (Length) : ± 0.5mm/m

Remark : (1) Standard rolls: 100 m 25 AT 10 (2) APT® flex lengths: 1,500 - 24,000 mm (3) Minimum length for spliced belt is 400mm

(4) Specific size available on request (5) Minimum order quantities for APT® and APT® flex on request.

APT®




APT® PU Welded Endless (APT® V) & Flex Timing Belts (APT® Flex)

ASHUTOSH

APT® Welded endless timing belts :

APT® M belts can be joined to APT® V (welded endless) timing belts of different lengths. Tension Members run parallel to the edge with interrupted connection. Specific sizes can be manufactured on request subject to the following restrictions.

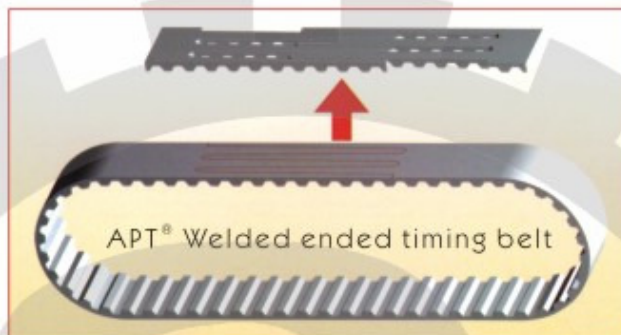

All Dimensions in MM

Type	AT5	AT10	AT20	T5	T10	T20	H	XH	L	XL
Min .length	400	400	1400	400	400	1400	400	1500	400	400
Max .width	100	150	150	100	150	101.6	101.6	101.6	101.6	50.8

Type	HTD3M	HTD5M	HTD8M	HTD14M	RPP5M	RPP8M	RPP14M	STD3M	STD8M	STD14M
Min .length	400	400	400	1240	400	400	1500	400	400	1500
Max .width	100	100	100	115	100	100	115	100	100	115

APT® Flex timing belts :

APT® Flex timing belts are made of twist wire (steel cord or kevlar cord) and shaped by rolling continuously once. So they have high tensile strength, great precision, good transmission stability and abrasion proof.



Specific sizes can be manufactured on request subject to

Length	Min. 3000	Max. 14000
Width	As per APT® V Table above.	

APT®




APT® Timing Pulley

ASHUTOSH


AS Type	BS Type	AF Type	BF Type	W Type

Ordering Examples :


T Type Inch Pitch



T Type Metric Pitch



ARC Type Metric Pitch



Notes :


- The above are only exemplary representations for Timing Pulleys
- WE can supply Taper Lock Bush Pulleys as per customer requirements
- Our pulleys are well accepted by OEM as well as End users
- Manufacturing of Timing Pulleys can only be undertaken after receipt of approved drawing
- In case if drawing is not available, we will submit our drawing for approval.
- The material composition of Timing Pulleys is generally Aluminum, Steel or Cast Iron
- We can also carry out designing of New Timing Belt Drive System or Conversion of Frictional Drive System as well as Chain & Gear Drive System to Timing Belt Drive System.

APT®



APT® Rubber Transmission Belts

ASHUTOSH

WRAPPED CLASSICAL V-BELTS	Section	Top Width (mm)	Height (mm)	Angle (°)	Lengths (Inch)
	M	10.0	5.5	40	11~120
	A	12.5	9.0	40	18~360
	B	16.5	11.0	40	22~530
	C	22.0	14.0	40	33~600
	D	31.5	19.0	40	80~600
	E	38.0	25.5	40	110~600

WRAPPED NARROW V-BELTS	Section	Top Width (mm)	Height (mm)	Angle (°)	Lengths (Inch)
	3V	9.5	8.0	40	20~270
	5V	16.0	13.5	40	50~355
	8V	25.4	22.2	40	100~500
	SPZ	9.7	8.0	40	500~6850mm
	SPA	12.7	10.0	40	500~7800mm
	SPB	16.3	13.0	40	1250~8000mm
	SPC	22.0	18.0	40	2000~12500mm

RAW EDGE COGGED CLASSICAL V-BELTS	Section	Top Width (mm)	Height (mm)	Angle (°)	Lengths (Inch)
	HM	10.7	8.0	38	21~200
	AX	13.0	9.0	38	21~200
	BX	17.0	11.0	38	23~200
	CX	22.2	13.0	38	39~200

APT®




APT® Rubber Transmission Belts


ASHUTOSH

RAW EDGE COGGED NARROW V-BELTS	Section	Top Width (mm)	Height (mm)	Angle (°)	Lengths (Inch)
	3VX	10.0	5.5	40	25~200
	5VX	12.5	9.0	40	50~200
	SPZX	16.5	11.0	40	560~5050mm
	SPAX	22.0	14.0	40	732~5050mm
	SPBX	31.5	19.0	40	1250~5050mm
	SPCX	38.0	25.5	40	2000~5050mm

V-RIBBED BELTS	Section	Pitch (mm)	Height (mm)	Lengths (Inch)
	J (PJ)	2.34	3.70	16~120
	L (PL)	4.70	7.00	16~120
	K (PK)	3.56	4.30	16~120
	M (PM)	9.40	13.0	80~230

BANDED V-BELTS	Section	Pitch (mm)	Lengths (Inch)
	A	15.0	40~260
	B	19.0	60~510
	C	25.5	60~510
	D	37.0	110~600

APT®

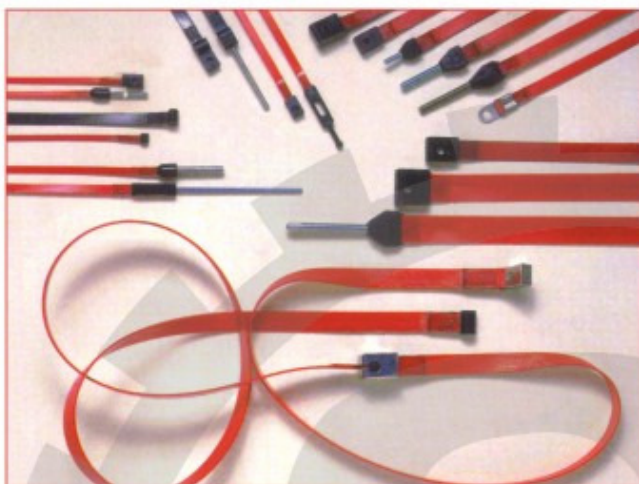

LIFTING NYLON STEEL TAPES

Lifting Tapes type	Thickness	Peak Loading in 10 mm width	Breaking Load	Minimum Pulley diameter	Width min - max
TA	1 mm.	70 kg.	200 kg.	30 mm.	5 / 60 mm.
TB	1.2 mm.	150 kg.	450 kg.	40 mm.	8 / 60 mm.
TB INOX (for wet spinning frames)	1.2 mm.	130 kg.	400 kg.	40 mm.	8 / 60 mm.
TC	2 mm.	350 kg.	1.100 kg.	85 mm.	5 / 50 mm.


- High tensile strength
- Dimensional stability
- Maximum flexibility
- No adjustments, maintenance and lubrication
- Replaces whatever chain drive
- Perfectly oil, grease, acid proof
- Unlimited endurance






APT® PU Round Belts

ASHUTOSH

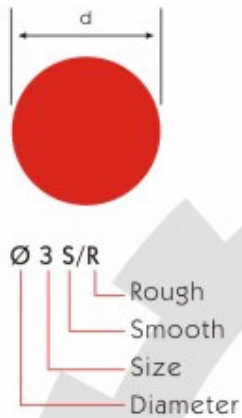


SMOOTH / ROUGH	Type	Diameter d(mm)	Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre-tension (%)	Standard packing (meter/roll)
	Ø3S/R	3	22,25,30	0.5,0.7,1	1.5~3	200
	Ø4S/R	4	30,35,40	0.95,1.2,1.8	1.5~3	200
	Ø5S/R	5	35,40,45	1.2,1.9,2.5	1.5~3	100
	Ø6S/R	6	45,50,55	1.9,3,3.7	1.5~3	100
	Ø8S/R	8	35,50,75	6,6.5,7	1.5~3	100
	Ø10S/R	10	70,75,80	5.3,7.5,9.5	1.5~3	50
	Ø12S/R	12	90,100,120	8,12,16.5	1.5~3	30
	Ø15S/R	15	100,120,145	12.5,17.5,26	1.5~3	30
	Ø18S/R	18	120,145,160	17,25,38	1.5~3	30

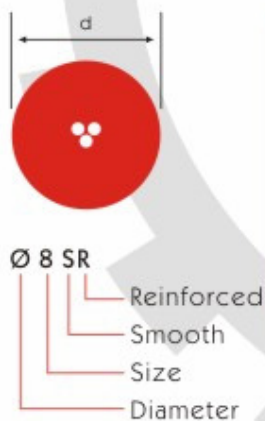

SMOOTH REINFORCED	Type	Diameter d(mm)	Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre-tension (%)	Standard packing (meter/roll)
	Ø8SR	8	100	5	0.5~1	100
	Ø10SR	10	120	7.5	0.5~1	50
	Ø12SR	12	145	12	0.5~1	30
	Ø15SR	15	160	17.5	0.5~1	30
	Ø18SR	18	180	25	0.5~1	30


Tolerances of round belts : • Diameter < 15 mm : ± 0.3 mm • Diameter > 15 mm : ± 0.5 mm

APT®




A - 13/V

V Belt
Size
Type



A - 13/VR

Reinforced
V Belt
Size
Type



A - 13/G

Grip
Size
Type

STANDARD V-BELTS	Type	Dimension d(mm)		Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre- tension (%)	Standard packing (meter/roll)
		b	h				
	A-13/V	13	8	90,100,112	8,12,14.5	1.5~3	50
	B-17/V	17	11	125,140,160	14, 21, 25	1.5~3	30
	C-22/V	22	14	160, 180, 200	23, 35, 42	1.5~3	30
	D-32/V	32	20			1.5~3	30


STANDARD REINFORCED V-BELTS	Type	Dimension d(mm)		Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre- tension (%)	Standard packing (meter/roll)
		b	h				
	A-13/VR	13	8	140	12, 30	1.5~3	50
	B-17/VR	17	11	160	21, 33	1.5~3	30
	C-22/VR	22	14	180	38	1.5~3	30

V-BELTS WITH SUPERGRIP	Type	Dimension d(mm)			Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre- tension (%)	Standard packing (meter/roll)
		b	h	H _i				
	A-13/G	13	8	11.5	90,100,112	8,12,14.5	1.5~3	50
	B-17/G	17	11	14.5	125,140,160	14, 21, 25	1.5~3	30
	C-22/G	22	14	17.5	160, 180, 200	23, 35, 42	1.5~3	30
	D-32/G	32	20	23.5			1.5~3	30



APT® PU V Belts


ASHUTOSH



A - 13/G R

Reinforced
Grip
Size
Type


REINFORCED V-BELTS WITH SUPERGRIP	Type	Dimension d(mm)			Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre- tension (%)	Standard packing (meter/roll)
		b	h	H _i				
	A-13/GR	13	8	11.5	90,100,112	8,12,14.5	1.5~3	50
	B-17/GR	17	11	14.5	125,140,160	14, 21, 25	1.5~3	30
	C-22/GR	22	14	17.5	160, 180, 200	23, 35, 42	1.5~3	30



A - 13/R

Ridge-top
Size
Type

RIDGE TOP V-BELTS	Type	Dimension d(mm)		Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre- tension (%)	Standard packing (meter/roll)
		b	h				
	A-13/R	13	17	220	18	1.5~3	50
	B-17/R	17	22	280	31	1.5~3	30
	C-22/R	22	28	350	52	1.5~3	30



B - 17/RR

Reinforced
Ridge-top
Size
Type


REINFORCED RIDGE-TOP V-BELTS	Type	Dimension d(mm)		Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre- tension (%)	Standard packing (meter/roll)
		b	h				
	B-17/RR	17	11	280	23.5	0.5~1	30
	C-22/RR	22	14	350	39	0.5~1	30

APT®



APT® PU V Belts


ASHUTOSH



B - 17/R1

Special ridge-top
Size
Type


SPECIAL RIDGE-TOP V-BELTS	Type	Dimension d(mm)		Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre- tension (%)	Standard packing (meter/roll)
		b	h				
	B-17/R1	17	19	160	23	1.5~3	30
	C-22/R1	22	23.5	200	38	1.5~3	30



B-17/R1R

Reinforced
Special ridge-top
Size
Type

REINFORCED SPECIAL RIDGE-TOP V-BELTS	Type	Dimension d(mm)		Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre- tension (%)	Standard packing (meter/roll)
		b	h				
	B-17/R1R	17	19	160	23	0.5~1	30
	C-22/R1R	22	23.5	200	38	0.5~1	30



A - 13/D

Double section
Size
Type

DOUBLE SECTION V-BELTS	Type	Dimension d(mm)		Pulley min. diameter (ømm)	Max. tensile strength (T)	Pre- tension (%)	Standard packing (meter/roll)
		b	h				
	A-13/D	13	10	120	17	1.5~3	50
	B-17/D	17	14	160	30	1.5~3	30
	C-22/D	22	17	220	48	1.5~3	30

All size of PU transmission belts' tolerances : • Width : ± 0.5 mm • Height : ± 0.5 mm


Remark : (1) Normal color is Green / Red. (2) Please order according to above standard packing
(3) Specific sizes can be manufactured on request.

APT®



APT[®] Variable Speed Belts

ASHUTOSH

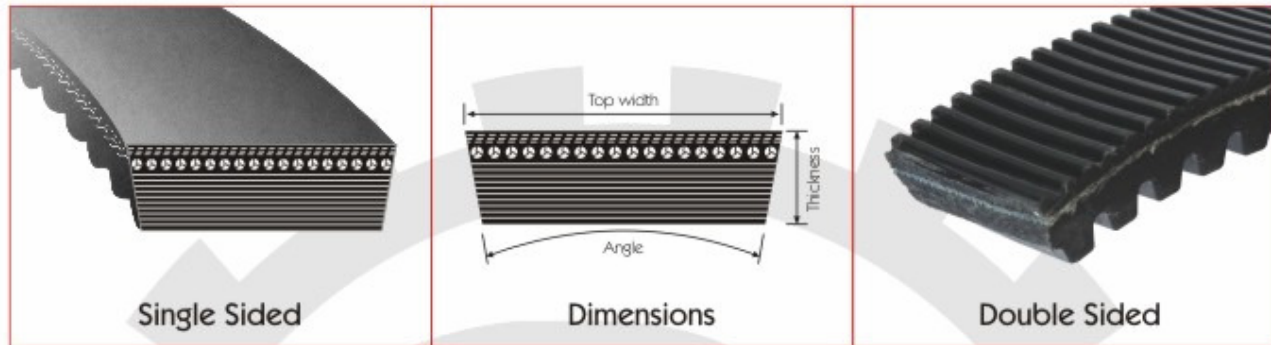

635 x 25 x 8 x 30

Degree (30°)

Thickness (8 mm.)

Top width (25 mm.)

Inside circumference (635 mm.)


Range : Inside circumference available from 24" - 76"

Thickness : Available from 8 mm. - 22 mm.

Angle : As per Customer requirement

Top width : Available from 13 mm. - 125 mm.

APT[®]

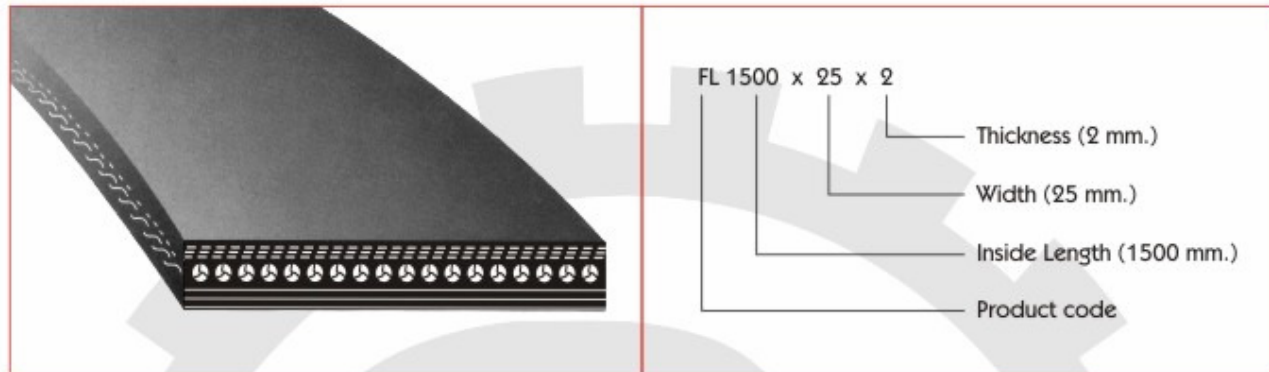

Size Range : Available from 100 mm. - 5000 mm.

Thickness Range : Available from 1.0 mm. - 2.5 mm.

Width Range : Available from 6.0 mm. - 200 mm.


Seamless flat Belts are manufactured from Imported Chloroprene Rubber having anti heat, anti oil and anti wear - out properties. They are reinforced with special cords having high intensity and very less elongation. Thus, these Seamless Flat Belts become the most satisfactory belts in high speed transmission.



APT® Poly Flex Belts



ASHUTOSH

Single Rib



5M 1000
Effective outside length in mm
Belt type

Multiple Ribs

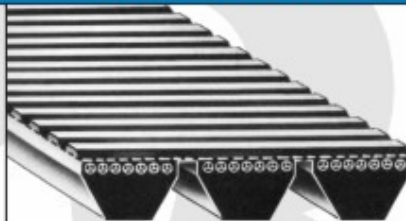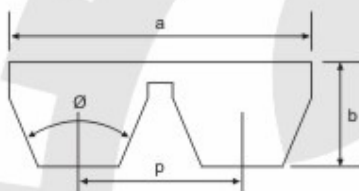

3 - 5MS 800
Outside length in mm
Type
Number of ribs

Type		Top Width a	Thickness b	Angle ø	Pitch p	Size Range
3M	1 Ribs	0.12" (3.0 mm.)	0.08" (2.0 mm.)	60°		7.1"-29.5" (180mm-750mm)
	2 Ribs	0.20" (5.0 mm.)	0.12" (3.0 mm.)	60°	0.21" (5.3 mm.)	11"-59.1" (280mm-1500mm)
	3 Ribs	0.39" (9.8 mm.)				
7M	1 Ribs	0.28" (7.0 mm.)	0.20" (5.0 mm.)	60°	0.33" (8.5 mm.)	19.7"-90.6" (500mm-2300mm)
	2 Ribs	0.61" (15.6 mm.)				
	3 Ribs	0.95" (24.1 mm.)				
11M	1 Ribs	0.43" (11.0 mm.)	0.28" (7.0 mm.)	60°	0.52" (13.2 mm.)	28"-90.6" (710mm-2300mm)
	2 Ribs	0.96" (24.4 mm.)				
	3 Ribs	1.48" (37.6 mm.)				

APT®



APT® Nylon Sandwich Belts

ASHUTOSH

Rubber Nylon Sandwich Belt	Type	Top/Bottom	Nylon Thickness	Total Thickness (Aprox.)
	RR1	Rubber/Rubber	8 mm.	2.0 mm.
	RR2	Rubber/Rubber	1.6 mm.	3.0 mm.
	RR3	Rubber/Rubber	2.4 mm.	4.0 mm.
	RR4	Rubber/Rubber	3.2 mm.	5.0 mm.

Leather Nylon Sandwich Belt	Type	Top/Bottom	Nylon Thickness	Total Thickness (Aprox.)
	LL06	Leather/Leather	0.4 mm.	3.5 mm.
	LL10	Leather/Leather	0.8 mm.	4.0 mm.
	LL14	Leather/Leather	1.2 mm.	5.0 mm.
	LL20	Leather/Leather	1.6 mm.	6.0 mm.

Leather Nylon Sandwich Belt	Type	Top/Bottom	Nylon Thickness	Total Thickness (Aprox.)
	LF06	Fabric/Leather	0.4 mm.	3.0 mm.
	LF10	Fabric/Leather	0.8 mm.	3.5 mm.
	LF14	Fabric/Leather	1.2 mm.	4.0 mm.
	LF20	Fabric/Leather	1.6 mm.	5.0 mm.


Fabric Nylon Sandwich Belt	Type	Top/Bottom	Nylon Thickness	Total Thickness (Aprox.)
	FF06	Fabric/Fabric	0.4 mm.	0.6 mm.
	FF10	Fabric/Fabric	0.8 mm.	1.2 mm.
	FF14	Fabric/Fabric	1.2 mm.	1.6 mm.
	FF20	Fabric/Fabric	1.6 mm.	2.0 mm.

APT®



APT® PVC Conveyor Belts


ASHUTOSH

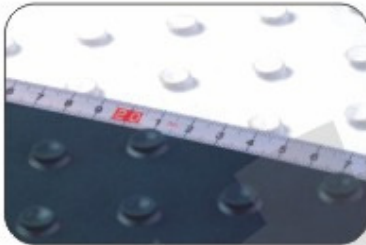


CD-16KBR/B




CD-60TCR/B

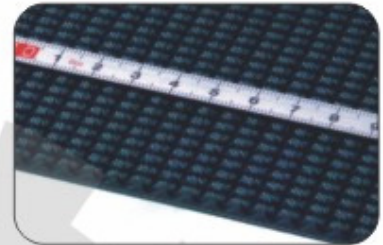


CD-8GBR/B

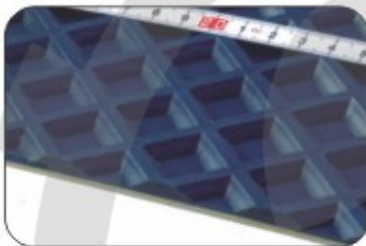


CG-15HCR/D

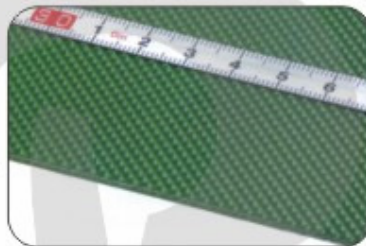


CG-10SCR/C

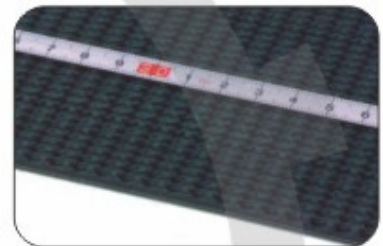

CD-12GBR/C

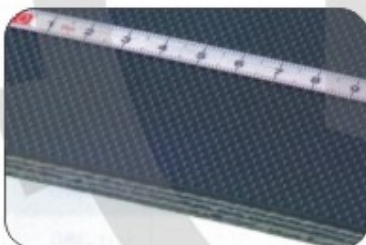


CD-80MDR/B

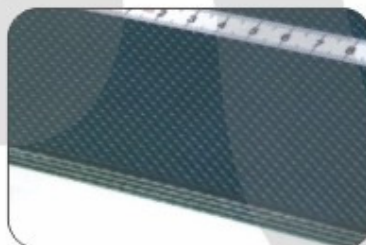

CD-70PDR/B



CY-25SCR/B

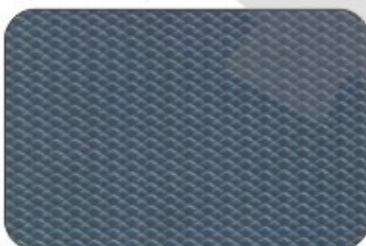

CD-18PCR/D



CG-10SBR/C



CB-8SBR/E

APT®




APT® Special Backings

ASHUTOSH




APT® Belt
With Linatex coating

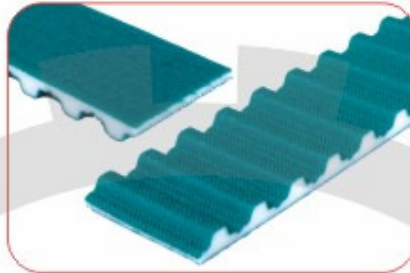


APT® Belt
With Polyamide fabric (PAZ)




APT® Belt
With Clear polyurethane coating

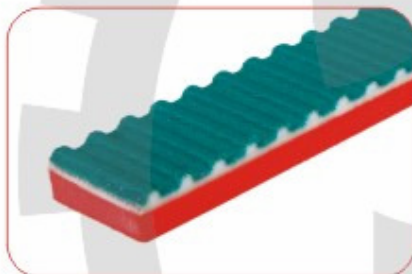


APT® Belt
With Linatex & PAZ coating

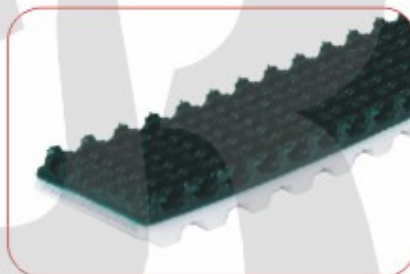

APT® Belt
With Supergrip coating

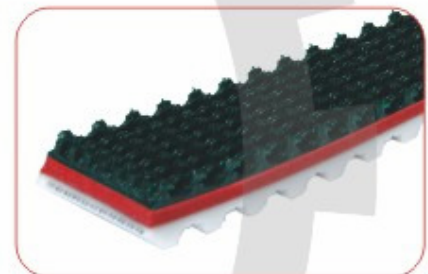


APT® Belt
With Linatex & Honey comb coating

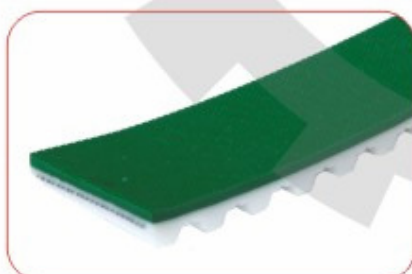

APT® Belt
With PVC coating



APT® Belt
With Black rubber coating

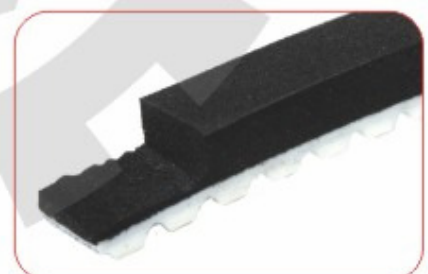

APT® Belt
With Sponge coating

APT®



APT® Special Designs


ASHUTOSH




APT® Double-side timing belt
DB type




APT® Double-side timing belt
DA type

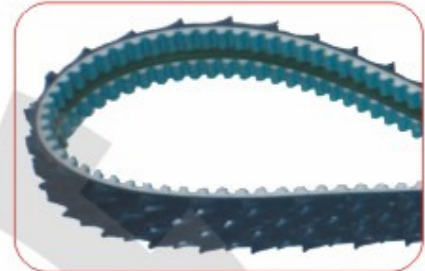

APT® Self - Tracking timing belt
with super grip

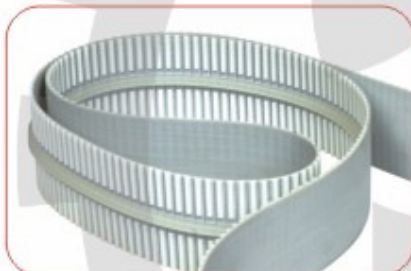

APT® Self - Tracking timing belt

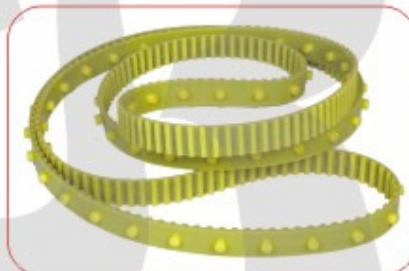

APT® Special button belt
for textile machine



APT® timing belt
with special pitch



APT® Timing belt with
welded cleats



APT® Self-Tracking conveyor belt
with linatex coating



APT® Timing belt with
holes

APT®



TIMING BELT



Manual
Cutting Machine
Single Blade



Motor Operated
Cutting Machine
Single Blade



Motor Operated
Cutting Machine
Multi Blade

PU V BELT & ROUND BELT



Jointing Machine



Jointing Heater



Cutter

FLAT BELT & CONVEYOR BELT



Flat Belt Hot Press



Splicer



Conveyor Belt Press



Belt Fasteners



APT[®] Timing Belt Drive Selection Form

ASHUTOSH

Client Name : _____ Contact Person : _____

Address : _____ Contact Number : _____

DRIVER DETAILS :

Type & Description _____

Rated HP _____ or Torque (Lb - Ln) _____

Rated Constant Speed (rpm) _____ If Variable Speed, Min. rpm _____ Max rpm _____

Shaft Dia. _____ Length _____ Key way Width _____ Key way Depth _____ Set Screw _____

Pulley Max OD _____ Pulley Max Width (Including HUB) _____

DRIVEN MACHINE DETAILS :

Types & Description _____

Types of Load : ☐ Uniform ☐ Light Shock ☐ Medium Shock ☐ Heavy Shock

Peak HP _____ or Torque (Lb - Ln) _____

Rated Constant Speed (rpm) _____ If Variable Speed, Min. rpm _____ Max rpm _____

Shaft Dia. _____ Length _____ Key way Width _____ Key way Depth _____ Set Screw _____

Pulley Max OD _____ Pulley Max Width (Including HUB) _____

CENTER DISTANCE DETAILS :

Minimum Required _____ Maximum Allowed _____

Type Of Adjustment : ☐ Adjustable Base ☐ None

Idler Pulley : ☐ None ☐ Inside ☐ Outside ☐ Slackside ☐ Tight side ☐ Diameter _____

SPECIAL CONSIDERATIONS :

Approx. Hours of Operation per day _____

Abnormal Temperatures _____

Excess : ☐ Oil ☐ Dust ☐ Water ☐ Abrasive ☐ Static

Starting Method : ☐ Clutch ☐ No Load

Operation : ☐ Frequent Stop & Start ☐ Load Reversals ☐ Other

APT[®]

PU V & Round Belts




Accessories



Cogged V Belts & Variable Speed Belts




Conveyor Belts

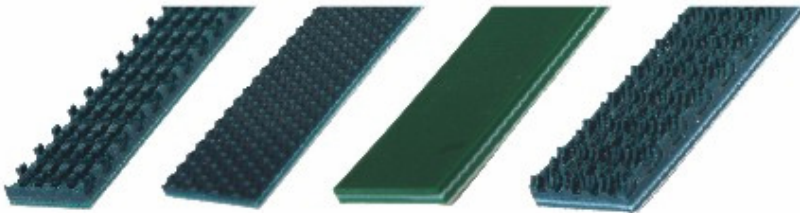

Nylon Sandwich Belts



Poly V Belts

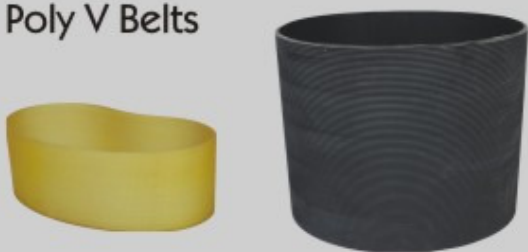

Seamless Belts



Special Belts





Ashutosh Power TransBelts Ltd.

707, " HEMKOOT ", Opp. Capital Com. Centre, Ashram Road, Ahmedabad - 380 009 INDIA.
Phone : +91-79 - 26580282, 26581238 Fax : +91-79 - 26581238 Mobile : +91-9879000589
e-mail : aptbelts@gmail.com website : www.aptbelts.com