



Mid-Rise Scissor Lift

MT-ML3000



FEATURES:

- Ideal choice for quick tyre replacement and simple service alongside of vehicle ;
- Special and practical platform extension design broadens your service scope;
- Surface mounted or movable used, with optional movable kits;
- Pneumatic release system decreases noise emitted during service work;
- Configuring mechanical safety lock to ensure that lift at different heightsto get the absolute security;
- Optional 24V control voltage;
- Dynamic testing with 115% of rated capacity and static testing with 150% ofrated capacity;
- Anti- skid platform effectively prevents sudden drop-down of vehicle ;




Specification


Lifting capacity	3000kg/660lbs	Lifting time	30s
Max.lifting height	1000mm	Air pressure	6-8bar
Min.height	110mm	Motor power	2.2kw
Overall length for platform	1400mm	Power Supply	110V/230V/400V
Overall width for platform	1760mm	Weight	550kg
Width between platform	700mm (optional 850mm)		
Packing size	1900*1550*220+380*420*1050		

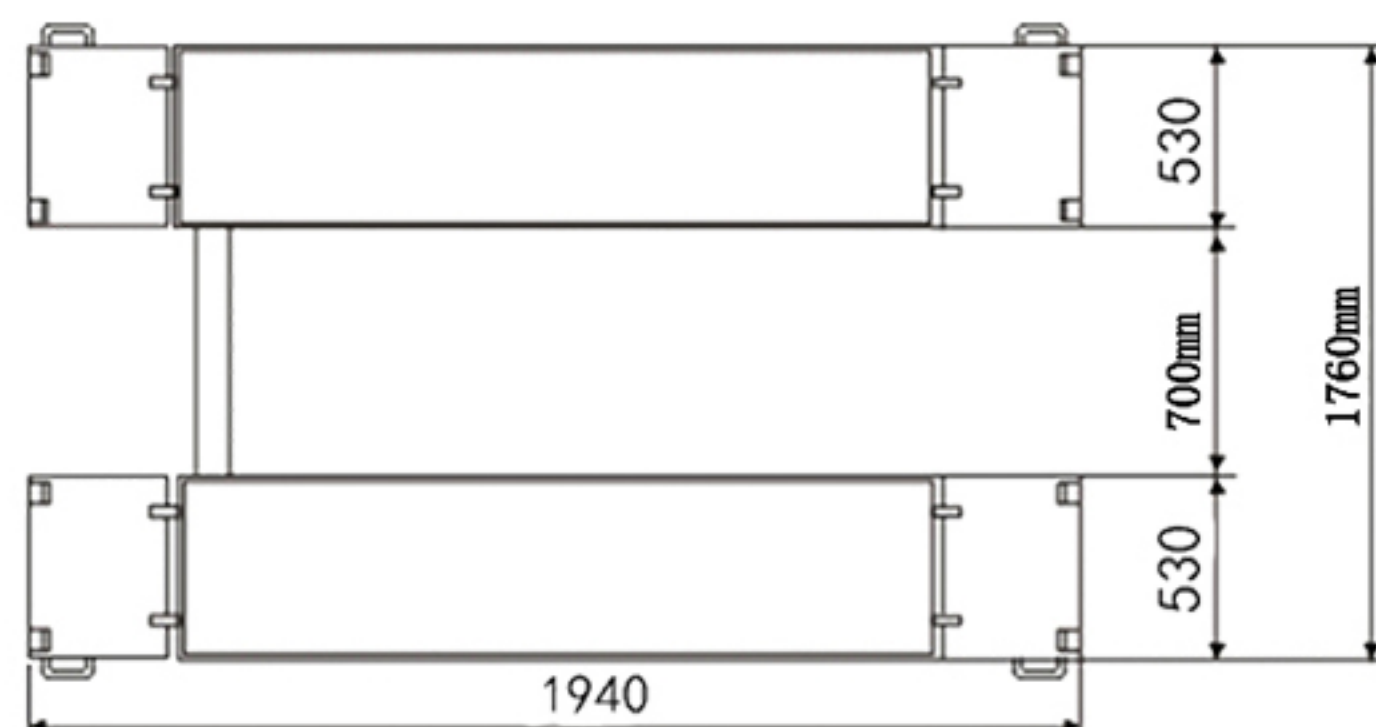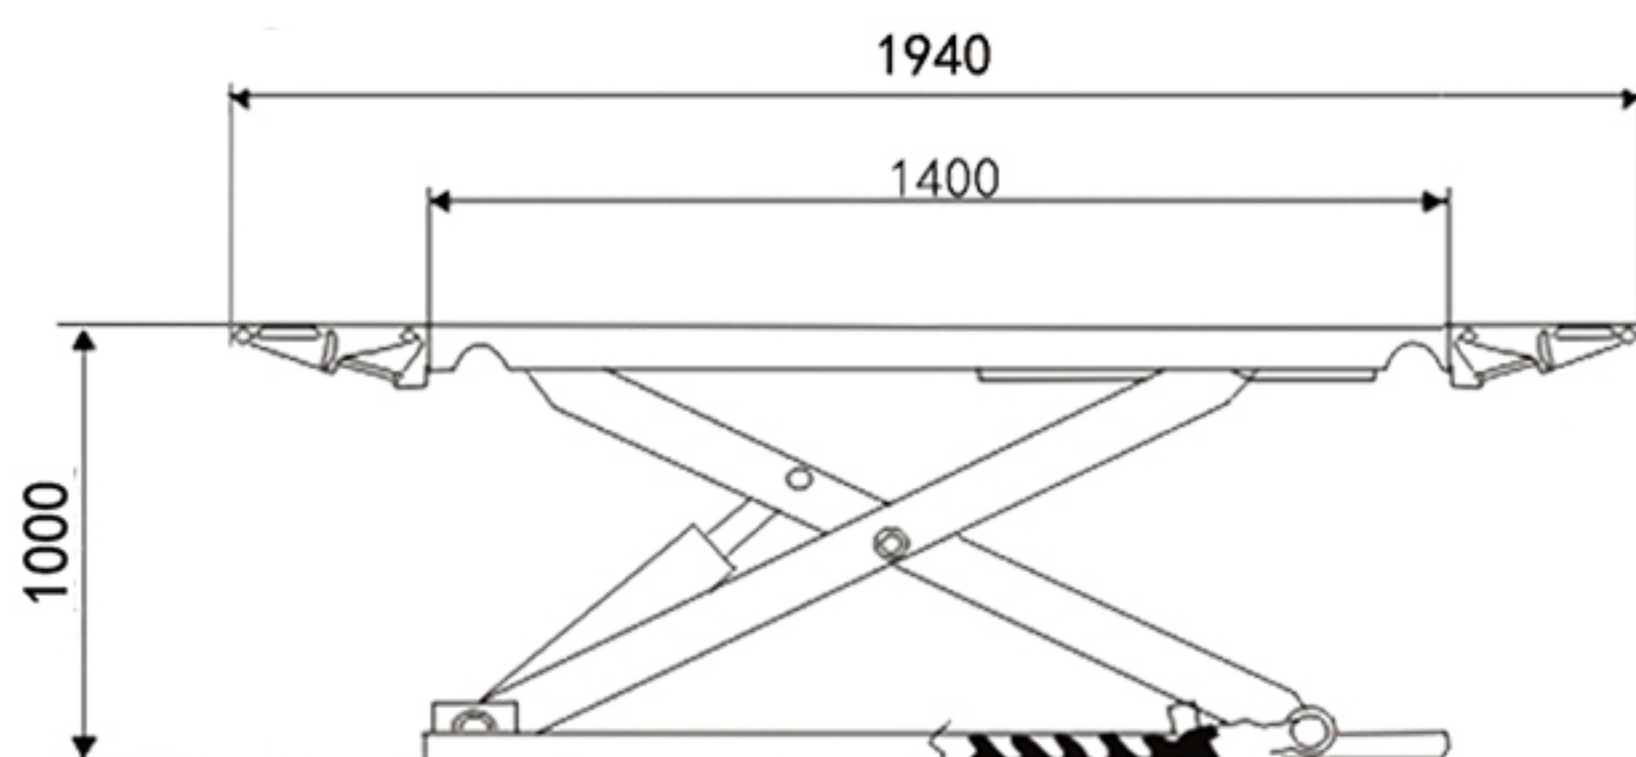


control box movable
electro-hydraulic power unit

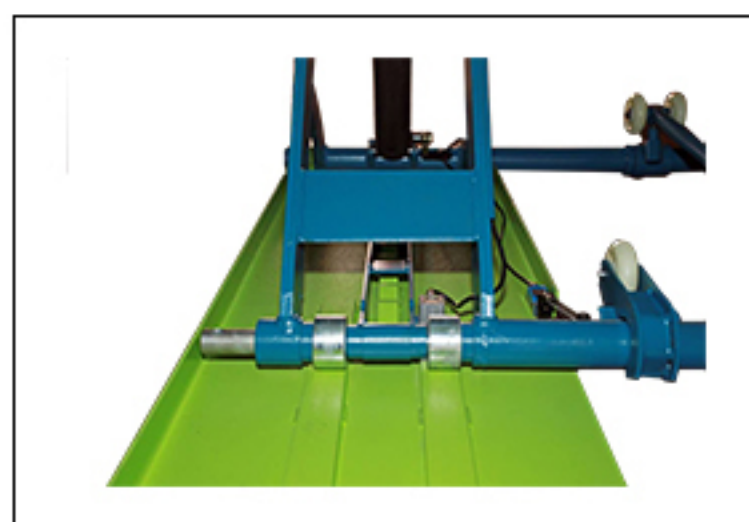


Dural metal wheel

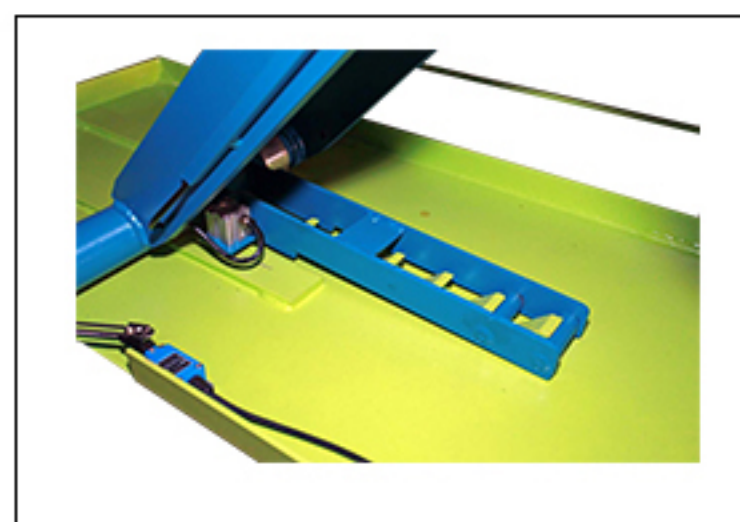

Fixed safety lock

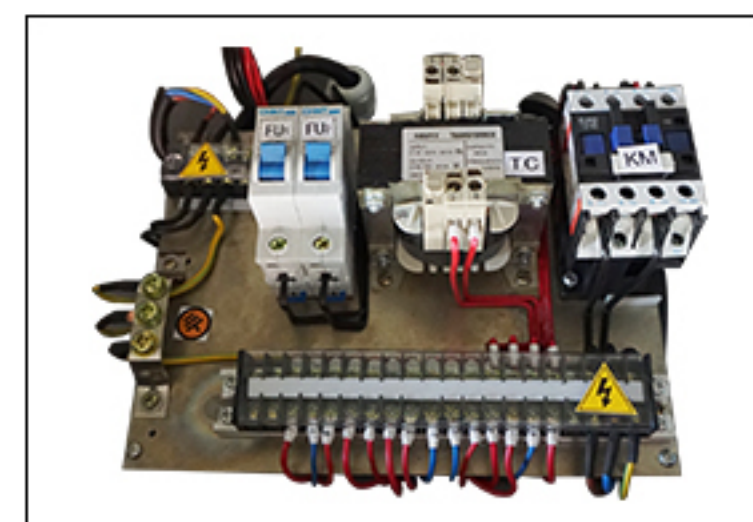


High-end electrical components

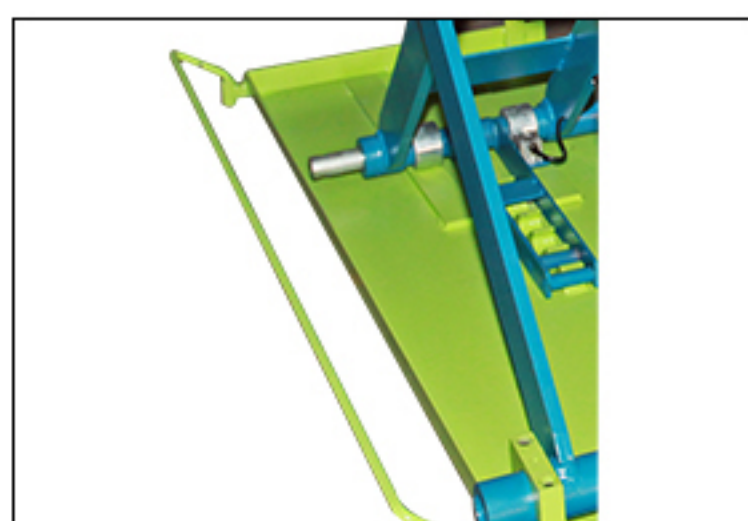


Toe protection



Spare parts for moving

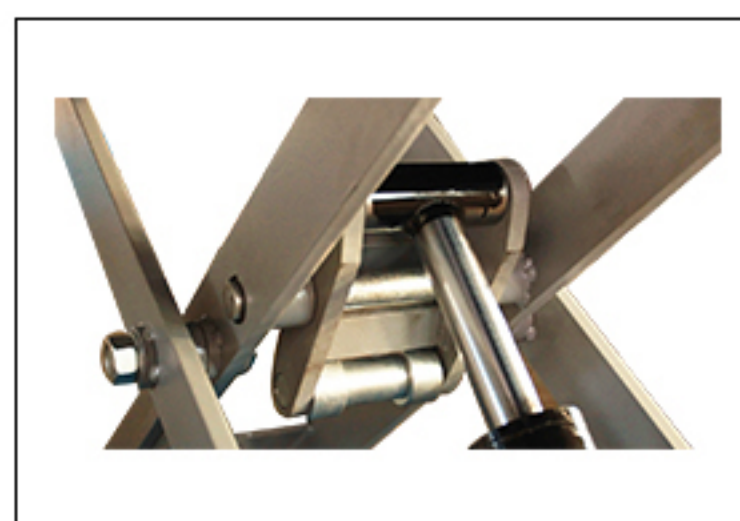

Increase the zero Angle
lift capability (optional)

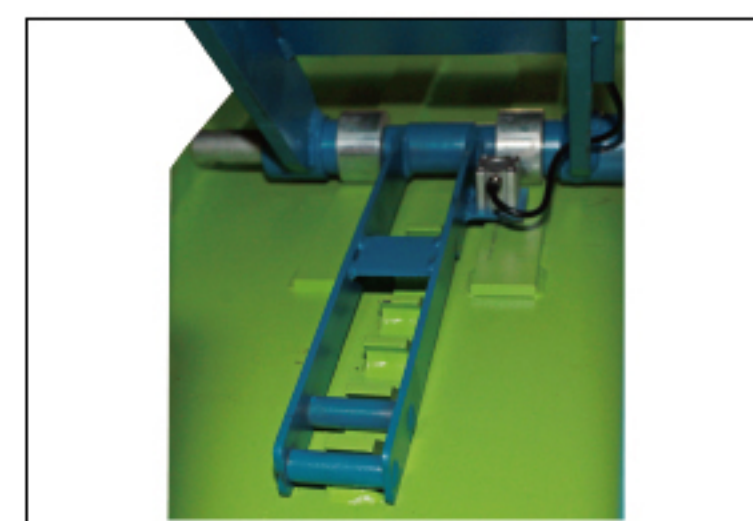

pneumatic lock



The strengthen extension
slope can support the vechicle



Bearing design inside to increase
the sliding stability and durability

