



SELECTIVE SOLDERING MACHINES

CELEBRATING MORE THAN 25 YEARS IN THE AUTOMATED SOLDERING INDUSTRY

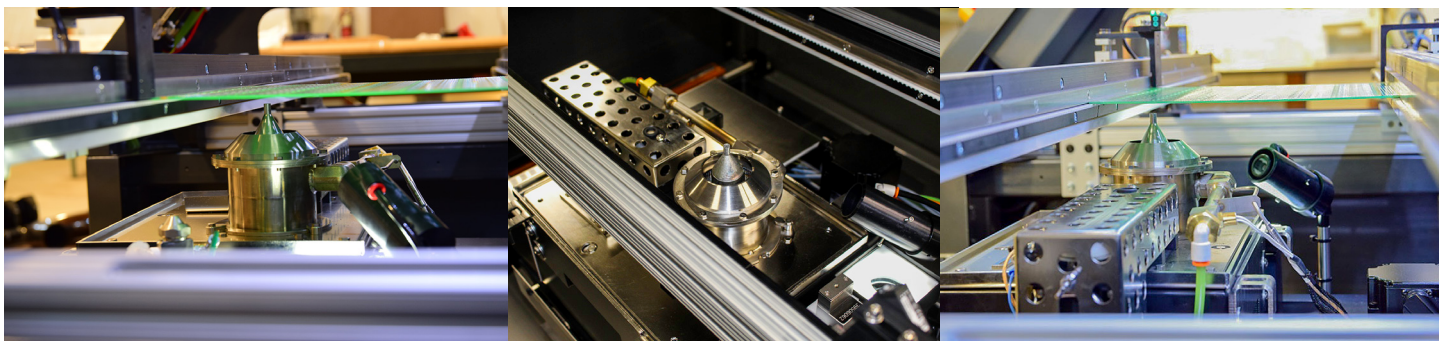

 **HENTEC**
INDUSTRIES

RPS



Proudly made in the USA

SELECTIVE SOLDERING MACHINES

Vector 300

Purpose:	PCB Assembly Miniwave Motion
Price:	Entry Level
Solder Pot Capacity:	35lbs 15.9 kgs
Process Range:	12 x 12" 300 x 300 mm
Min/Max PCB Size:	1 x 1" to 14 x 18" 25 x 25 mm to 355 x 457 mm
Footprint:	52 x 49 x 50" (D x L x H)
Features:	Servo Motion Control Batch Load Standard Lead Screw



Vector 460

Purpose:	PCB Assembly Miniwave Motion
Price:	Entry-Mid Level
Solder Pot Capacity:	35lbs 15.9 kgs
Process Range:	18 x 18" 460 x 460 mm
Min/Max PCB Size:	1 x 1" to 20 x 22" 25 x 25 mm to 508 x 559 mm
Footprint:	58 x 55 x 50" (D x L x H)
Features:	Servo Motion Control Batch Load Standard Lead Screw



Vector 600

Purpose:	Large PCB Assembly Miniwave Motion
Price:	Mid Level
Solder Pot Capacity:	35lbs 15.9 kgs
Process Range:	24 x 24" 600 x 600 mm
Min/Max PCB Size:	1 x 1" to 26 x 28" 25 x 25 mm to 660 x 711 mm
Footprint:	78 x 55 x 50" (D x L x H)
Features:	Servo Motion Control Batch Load Standard Lead Screw



Valence 3508

Purpose:	High Volume PCB Assembly Miniwave Motion
Price:	Mid-High Level
Solder Pot Capacity:	25 lbs 11.4 kgs
Process Range:	20 x 20" 508 x 508 mm
Min/Max PCB Size:	1 x 1" to 22 x 24" 25 x 25 mm to 559 x 610 mm
Footprint:	135 x 60 x 60" (D x L x H)
Features:	Electromagnetic Pump Digital Pyrometer Top and Bottom Side Preheat Automatic Load Inline SMEMA Continuous Duty Multi-Station High Efficiency Ball Screw



STANDARD FEATURES

Steel welded frame
Integrated computer | Unlimited programs
Hentec ConductorPRO™ Software
Spray or Drop Jet Fluxer
Low dross/ low maintenance
Hentec PROHeat™ N2 Independent Temp Control
Lead free compatible
LiveView™ Witness Camera
Fiducial Auto Correct
1.5 mm Standard Keep Away (0.5 mm capable)
UL and CE certified
Closed Loop Wave Height Sensor
Two year system warranty
Four year solder pot warranty

ADDITIONAL STATIONS AND UPGRADES


Vector Series:
Top Side Preheat
Conventional Wave Nozzles
Dual Flux Nozzles
Custom Nozzles
SMEMA Inline Operation
Dual Chemistry Flux
Extended Warranty

Valence Series:
Auto Solder Feeder
2 or 3 Station Configurable

Hentec offers easy-to-use selective soldering systems for miniwave soldering of post reflow through-hole components, and odd form printed circuit board assemblies. The single gantry systems were designed for high mix, mid volume needs, as well as multi-station inline systems for high volume applications. Miniwave nozzles can be easily changed via magnetic coupling. Flux systems can be configured with single or multiple spray and/or high precision drop jet nozzles.


UNMATCHED THERMAL CAPACITY | INCREASED ROI | RAPID PROGRAMMING

Hentec ProHeat™ is a key thermal innovation. Providing closed loop programmable control of independently heated N₂, for miniwave inertion, yields an unmatched thermal efficiency. This unique thermal capacity means the system can be deployed across the widest spectrum of applications, thereby increasing the ROI. Hentec selective soldering systems provide industry leading thermal transfer at the point of soldering. This produces superior solder joints lessening the need for top-side preheat; saving time, money, and reducing the risk for component damage. All Hentec systems are easy to program and operate. The Hentec ConductorPRO™ programming software provides a simple interface for offline or online rapid programming. For example; import a scanned image or Gerber data, select nozzle type and solder points to generate a selective soldering program in just minutes. Hentec ConductorPRO™ is able to store an unlimited number of programs.

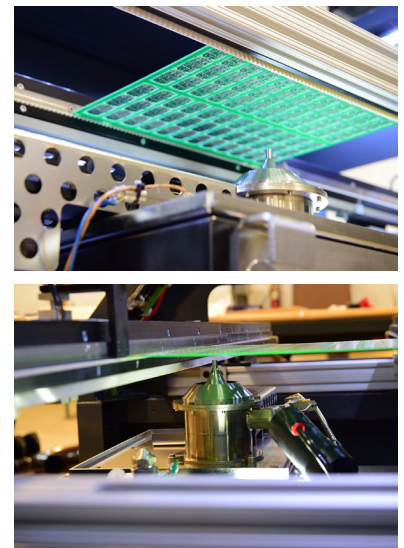


HIGH PRECISION

All Hentec systems come standard with reliable closed loop servo motion control; enabling repeatable and worry-free soldering accuracy. Proprietary pump, nozzle, and control software provide a tall stable miniwave, yielding industry leading 0.5 mm keep aways. The tall stable miniwave can solder leads up to 6 mm long, eliminating the need to trim leads or exclude a project due to long lead length.

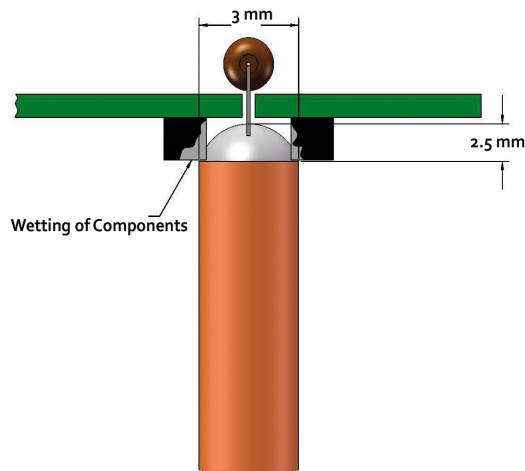

Others

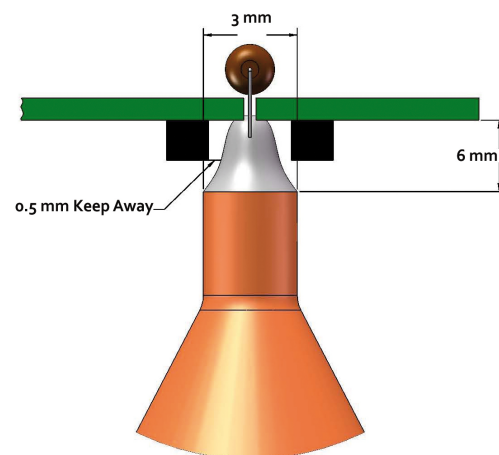

Hentec Advantage

SUCCESS IN THE FIELD

"The versatility of the Hentec selective soldering system is phenomenal. We've processed PCB's from .032" through .100 thick with no problems, and changing to a new PCB process is a breeze."

- Shannon Duffy, Manufacturing Manager at Circle Prime

GLOBAL DISTRIBUTORS: United States, Canada, Australia, Brazil, China, Europe, Mexico, Phillippines, Russia, South Korea, United Kindom, Israel, Italy, France



25517 E Kildea Road Newman Lake, WA, 99025, USA
© Hentec Industries, Inc 2020



website: www.rpsautomation.com
email: sales@rpsautomation.com
phone: 509.891.1680