

MODEL: PSA-10K-PB500

Specifications:

Nitrogen Purity at 4000 SCFH - 99.999%
Nitrogen Purity at 6200 SCFH - 99.90%
Nitrogen Purity at 10,400 SCFH - 99.50%
Two Boost Pumps - Oil Free 25HP each, 300-500 psi
Dual Redundant Oil Free System
Cuts with shop air at 5,200 SCFH at 500 psi for Aluminum

Customer Supplied Provisions:

- 1) One breaker protected, 3 Phase, 480V, 70A power supply to the nitrogen generator with a fused locked disconnect.
- 2) Shop air 130-145 psi, (300 SCFM, minimum) which needs to be delivered to the nitrogen generator free of oil vapor and water, particulates down to .01 microns, dry air to 34 degrees F pressure dew point at 145 psi.
- 3) Shipping expense from Minden, Nevada to the customer's location. Loading at Minden will be provided by INTO N2, LLC.



Weight: 10,000 lbs

Manufacturer Training Included!

1-YEAR WARRANTY





Made in the USA



SAVE UP TO 90% ON NITROGEN COSTS

INTO N2, LLC
2554 Business Pkwy.
Minden, NV 89423

(775)267-3035
info@inton2.com
inton2.com

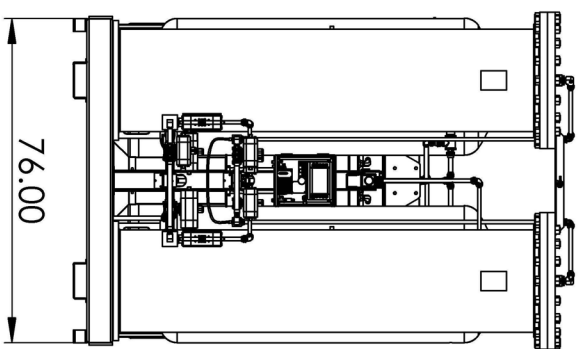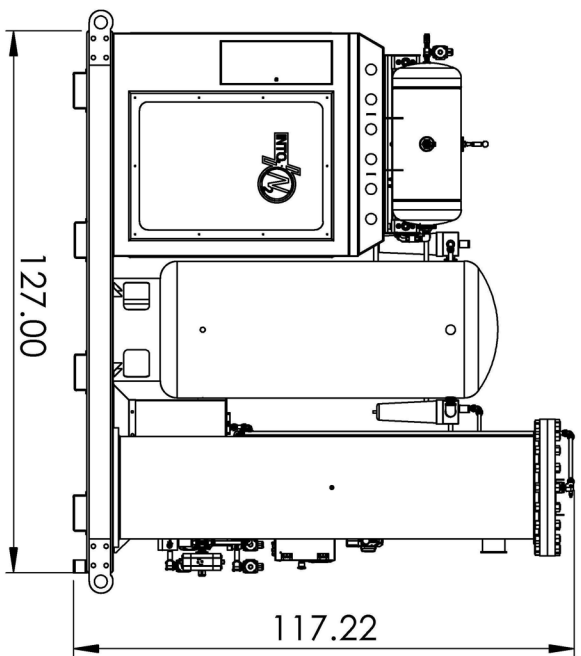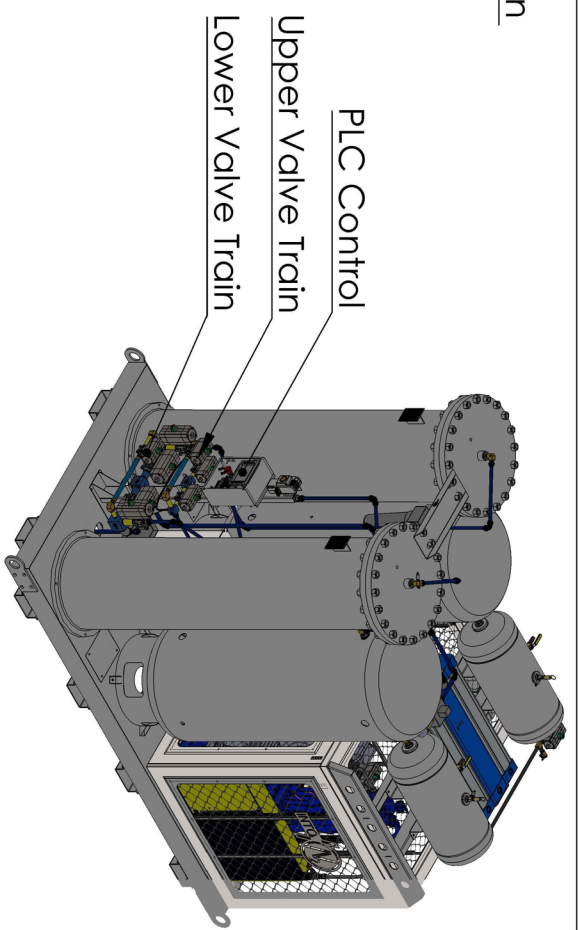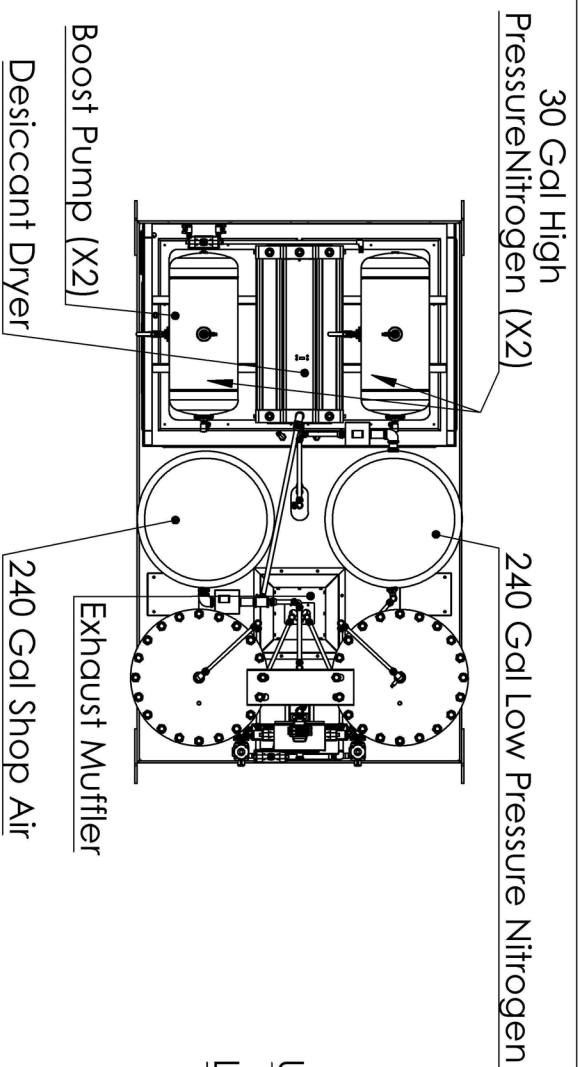

Specifications:

4,000 SCFH Nitrogen at 99.999% purity
 6,200 SCFH Nitrogen at 99.9% purity
 10,400 SCFH Nitrogen at 99.5% purity
 Air supply: 300 SCFM at 130-145 psi
 Free of oil vapor and water,
 particulate to .01 microns, dry air to
 34° F pressure dew point at 145 psi.
 Boost pumps: Oil Free 25 HP each 300-500 psi
 Machine weight: 10,000lbs

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 BURNS MACHINERY INC.. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 BURNS MACHINERY INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL: ±1/32
 ANGULAR: MACH ±.1 BEND ±.5
 TWO PLACE DECIMAL ±.02
 THREE PLACE DECIMAL ±.005
 MATERIAL

TITLE:			
INTO - N2 Minden, NV			
DWG. NO.		REV	
PSA-10K-PB500		13	
SCALE: 1:45		SHEET 1 OF 2	

NAME	DATE
Mitch	9-11-19
CHECKED	
COMMENTS:	
Rev- 13 9-11-2019	