




REIS STANDING SEAM TECHNOLOGIES

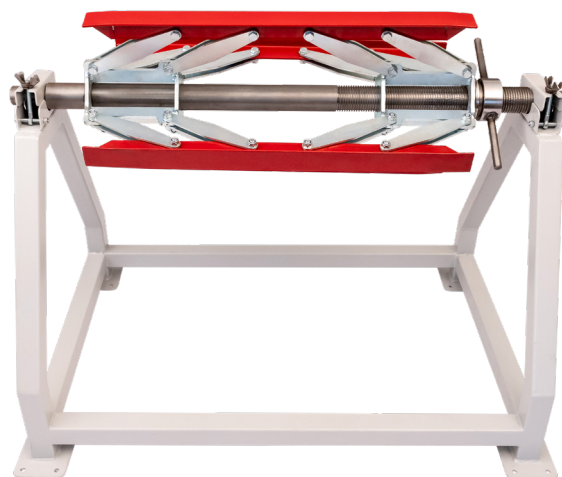

Operating in the standing seam metal roof machinery and equipment sector for more than 18 years, REIS Standing Seam Technologies has adopted continuous development, quality and customer satisfaction as its principle. Offering the best quality and complementary products of the standing seam roofing sector, which produces with the latest technology, REIS is the leader in the Turkish market.

REIS Standing Seam Technologies is a well-known brand in the world by exporting its products to more than 30 countries. It provides its customers with timely sales and service professionally.

REIS, which has adopted the mission of creating technological and economic differences throughout its entire development, has become a brand that has completed the production and tests of its products from the design stage with its R&D studies and brought them together with standing seam roof appliers. REIS Standing Seam Technologies offers non-competitive savings to its customers.

With the awareness that the only thing that does not change in the world is change, REIS will continue to be an exemplary brand for new generations in the future due to its mission.



100% Price and
Performance
Satisfaction



Machines
Working in
30+ Countries



18+ years
knowledge and
experience



Fast Delivery
Time



Productive Solutions
with Low Costs



Durable and
High Quality
Equipments



User Friendly
Equipments



Trustworthy
Service
Business


"R-PRO 25" STANDING SEAM PROFILING MACHINE



We produce the "R-PRO 25" Standing Seam Metal Roof Machine with the highest precision on the latest technology CNC processing machines.

With the user-friendly, strong, durable and robust "R-PRO 25" Standing Seam Profiling Machine, you can perform your standing seam applications in a quality-oriented manner.

As REIS STANDING SEAM TECHNOLOGIES; we always support our customers with spare parts on stock, from production to assembly, from sales to technical service.





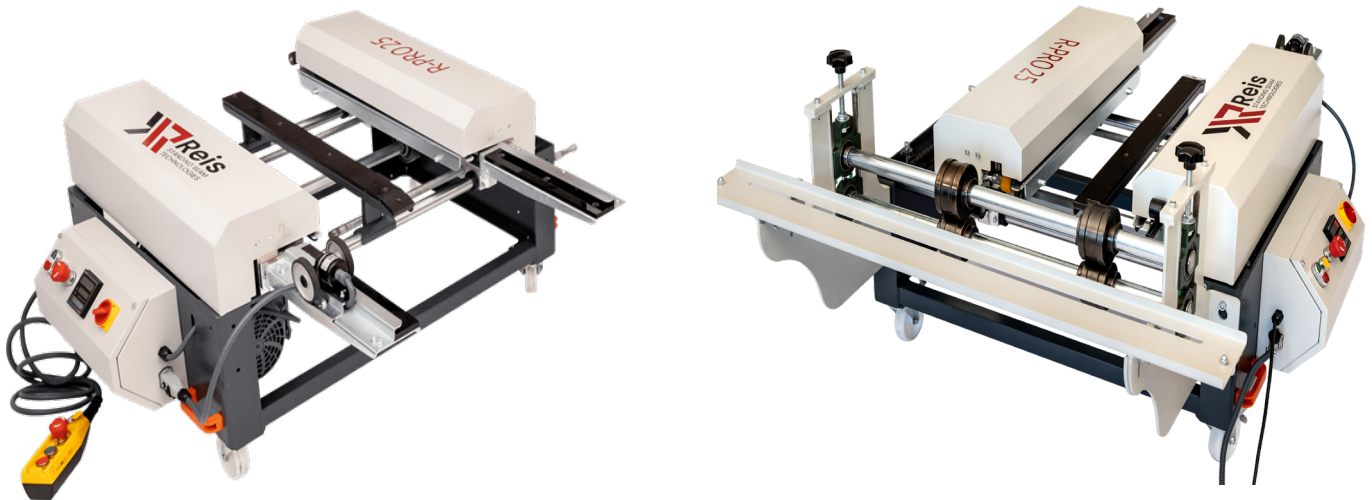


MAXIMUM MOBILITY AT LOW COST

There is no need for large, difficult to carry and costly standing seam roll forming machines, when there is a R-PRO 25 standing seam machine.

With our portable standing seam machine, high precision standing seam panel production is possible without any length limit.


EQUIPMENTS

	25 mm high seam panels are produced in a single pass from coils or sheets.	"R-PR025" Standing Seam roof machine consists of 4 parts. It can be disassembled and installed in a short period of time, if necessary.	
	Standing seam panels are produced in high quality, thanks to the use of 7 sets of optimized roll forming roller designs.	"R-PR025" Standing seam machine is suitable for all hard-to-reach jobsites and finds a place in the smallest workshops.	
	"R-PR025" Standing seam roll former can be easily transported by all kinds of panel vans and station wagons.	Quite light, weighs only 190 kgs. Standing seam machine that can be easily carried with 4 wheels.	
	● ● ● ● Detachable infeed arms	Reverse function and emergency stop	
	● ● ● ● ● ● Material fix, support base	Easy working around the machine thanks to the remote control with the extension cable	
	Special digital control unit for convenient entry of lengths and quantities	Making 25 mm wide – 1,1 mm deep longitudinal strip marks on the panel with optional ribbing attachment device	
	Waste-free cutting from the material length with the optional cutting device at the exit of the standing seam machine.	Production of the standing seam panels from conical sheets in two operations. The smallest axial dimension is 80 mm with single-sided standing seam production.	
	With the easy rotation of the crank, material width adjustment can be made quickly to the desired size within the range of 250 – 700 mm	CE Certificate	


QUALITY and TRUST

REIS STANDING SEAM TECHNOLOGIES


- Every manufactured "R-PRO 25" standing seam machine goes through delicate tests
- Easy maintenance
- CE Certificate
- EU Attestation of Compliance Certificate
- 2 years of warranty
- Strong management. Loyal, highly trained team.




Standard Standing Seam 25
Axial Width between 170-620 mm




Angled Standing Seam 25
Axial Width between 170-620 mm




Conical Standing Seam 25
Min and max measures are given




Standing Seam 25 - Both Sides Female
Input Width between 80-600 mm
Forming is done in 2 operations.



Standing Seam 25 - Both Sides Male
Input Width between 90-600 mm
Forming is done in 2 operations.



Standing Seam 25 - One side Female
Input Width between 80-620 mm




Standing Seam 25 - One side Male
Input Width between 80-600 mm

TECHNICAL FEATURES

Operating Voltage	220 V / 50 Hz / 1 ph.
Drive Power	1 x 1.1 kw
Operating Speed	9 m/min
Forming Stages	7 stations
Shortest Panel Length	500 mm
Infeed Width	250 – 700 mm
Axial Dimension	170 mm – 620 mm (depending on material)
Processable Materials	Titanium Zinc 0,60 - 0,80 mm Copper 0,50 - 0,80 mm Aluminium 0,60 - 0,80 mm Sheet Steel (Galvanized&Coated) 0,50 - 0,70 mm Stainless Steel 0,40 - 0,50 mm
Dimensions (L x W x W)	1200 mm x 900 mm x 580 mm(wheeled)
Weight	190 kg

“R1500” - DECOILER

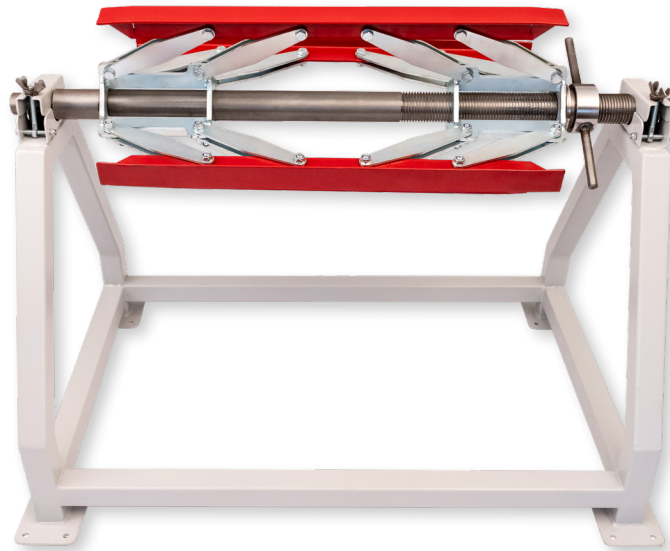

Economical manual decoiler compatible with standing seam machines, roll-form and industrial sheet metal working machines used for different purposes.

The “R-1500” decoiler model has a maximum lifting of 1500 kg and a working width of 800 mm.

Thanks to its light weight, it can be easily carried anywhere.

It has an inner diameter in the range of 30-60 cm. It can be narrowed and expanded with the adjustment lever.

Since it is internally compressed, the roll will never shift to the right or left.



QUALITY and TRUST – REIS STANDING SEAM TECHNOLOGIES

- It goes through delicate tests.
- It is manufactured from special profiles, has a robust chassis and is long-lasting.
- It has a very solid chassis.



SS - SINGLE HAND LOCK SEAMER 90°

It closes the standing seam panels at a 90° angle in a single operation with a fast and easy way. Working width 220 mm.

It is the hand seamer used for locking the panels produced by "R-PRO 25" Standing seam profiling machine.

Single lock standing seam metal roof system is designed to prevent water from entering the panels.

Standing seam panels cover each other when installed on the roof, so there is no space in between.



Weight	Jaw Width	Jaw Depth	Total Length
2.000 gr.	220 mm	50 mm	390 mm

DS - DOUBLE HANDLOCK SEAMER 180°

It closes the standing seam panels at a 180° angle with a fast and easy way. Working width 220 mm

It is the hand seamer used for locking the panels produced by "R-PRO 25" Standing seam profiling machine.

Double lock standing seam metal roof system is designed to prevent water from entering the panels.

Standing seam panels cover each other when installed on the roof, so there is no space in between.



Weight	Jaw Width	Jaw Depth	Total Length
2.500 gr.	220 mm	50 mm	480 mm




EC - EAVES CLOSING JAWS

Best hand seamer for closing the eaves on standing seam application with a fast and easy way.

By the help of this hand seamer tool, you guarantee water tightness at the eaves end. Working width 220 mm

Standing seam metal roof system is designed to prevent water from entering the panels.

Standing seam panels cover each other when installed on the roof, so there is no space in between.



Weight	Jaw Width	Jaw Depth	Total Length
2.100 gr.	220 mm	60 mm	400 mm



Address: Konaklar Mah. Selvili Sk. No:1/2 4. Levent / İstanbul 34330

Phone: +90 (212) 320 20 69

Whatsapp: +90 (212) 320 20 69

E-mail: info@reiskenet.com.tr



 /reis.standing.seam.technologies

 @reis-standing-seam

 /reis_standing_seam

 reiskenet.com.tr

