

Used 2000ton Open Die Forging Press

Manufacturer: Kawasaki (**Japanese famous brand**)

Manufacturing year: **2012**

Capacity: 2000 ton

Pressure: 30.0 MPa

Pulling capacity: 1000KN (100ton) (at Pressure 19.5MPa)

Stroke: 1500mm

Daylight: 2300mm

Table: 1650mm (R.L) x 2400mm (F.B)

Rotation type table: Diameter 1600mm

Non-load descending speed: 300mm/s

Pressing speed

Low output (below 1500ton): 45mm/s (at 100ton)~30mm/s(at 1500ton)

High output(below 2000ton): 30mm/s (at 1500ton)(~23mm/s(at 2000ton)

Ascending speed: 300mm/s

(Table carrying device: by hydraulic cylinder)

1650mm(R.L) x 4200mm (F.B)

Carrying stroke: 2500mm

Carrying speed: 200mm/s

Workpiece weight: 10 ton

(Top table rotation device: by hydraulic motor drive)

Size: diameter 1500mm

Rotation angle: 90 degree, 180degree

(Hydraulic pump)

Main pump: Axcel Plunger pump x 3units

(516~321L/min x 19.9 ~30.9MPa x rpm 970)

Auxiliary pump: Vain pump x 1unit

(65L/min x 5MPa x rpm 1450)

Cooler circulation pump x 2 units

(400L/min x Lift 25m x rpm 2950)

(Motor)

Main motor: 160KW x 6P x 3000V x 50HZ x 3 units

Auxiliary motor: 11KW x 6P x 200V x50HZ x

Cooler pump: 5.5KW x 6P x 200V x 50HZ x 2units

(Safety equipment)

an emergency stop button

automatic fall prevention device

Slide descent safety limit device

slide fall prevention device

Safety Cover

Price **FOB JAPANESE PORT \$US 340,000.00**




























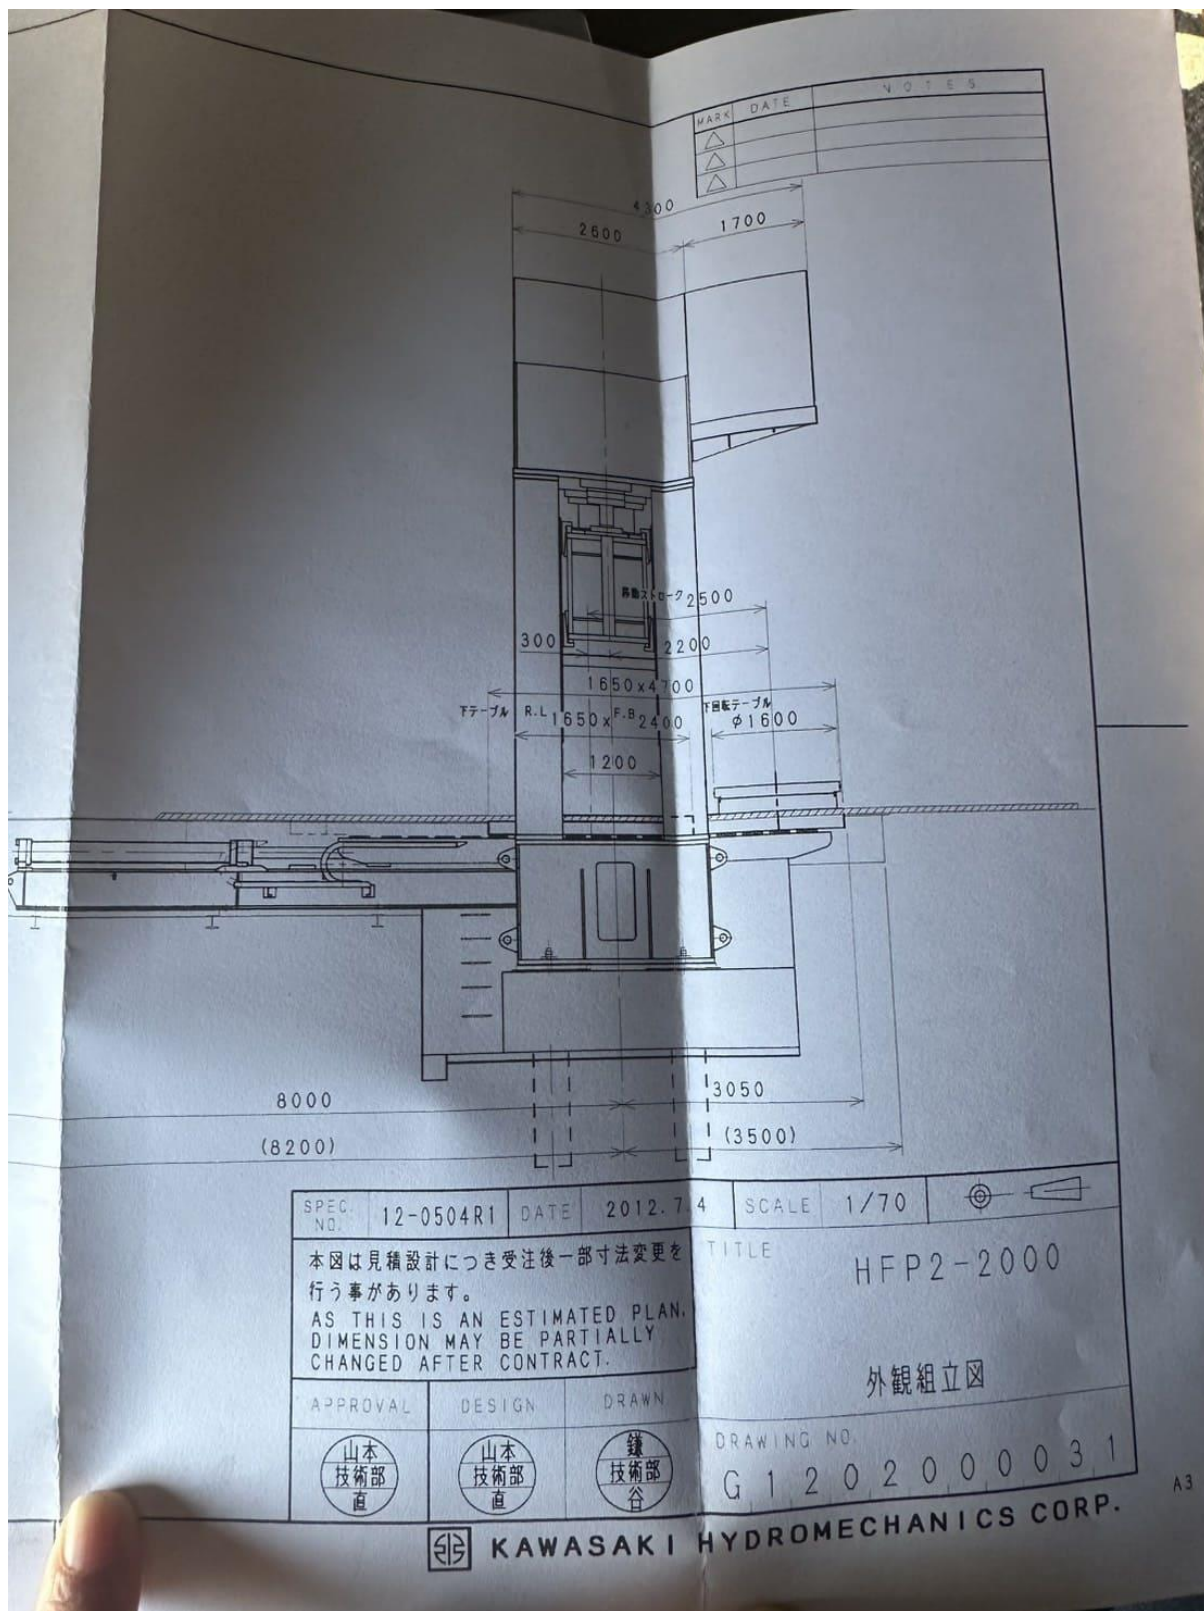

3. 操作回路・操作モード切換スイッチのキーは、作業主任者が管理

日本国外輸出に対する注意事項

本機は、日本国内の法規に基づいて製作されたもので、日本国外における使用又は販売を目的として輸出される場合は、相手国の安全規格を遵守することが必要です。
規格適合工事は、本機製造業者にご相談ください。

油圧プレス

型式	BP2-2000
圧力能力	20000 kN
最高圧力	25.6 MPa
ストローク長さ	1300 mm
テーブル高さ	1900 mm
テーブル寸法	1650 X 2400 mm
ストロークの最大下降速度	300 mm/s
慣性下降値	80 mm
急停止時間	240 ms
最大停止時間	1 s
製造番号	13-3030
製造年月	2015.03



川崎油工株式会社

兵庫県明石市二見町南二見15番地の1




警告



鋭利部による
あります。

メンテナンス
応じて予備

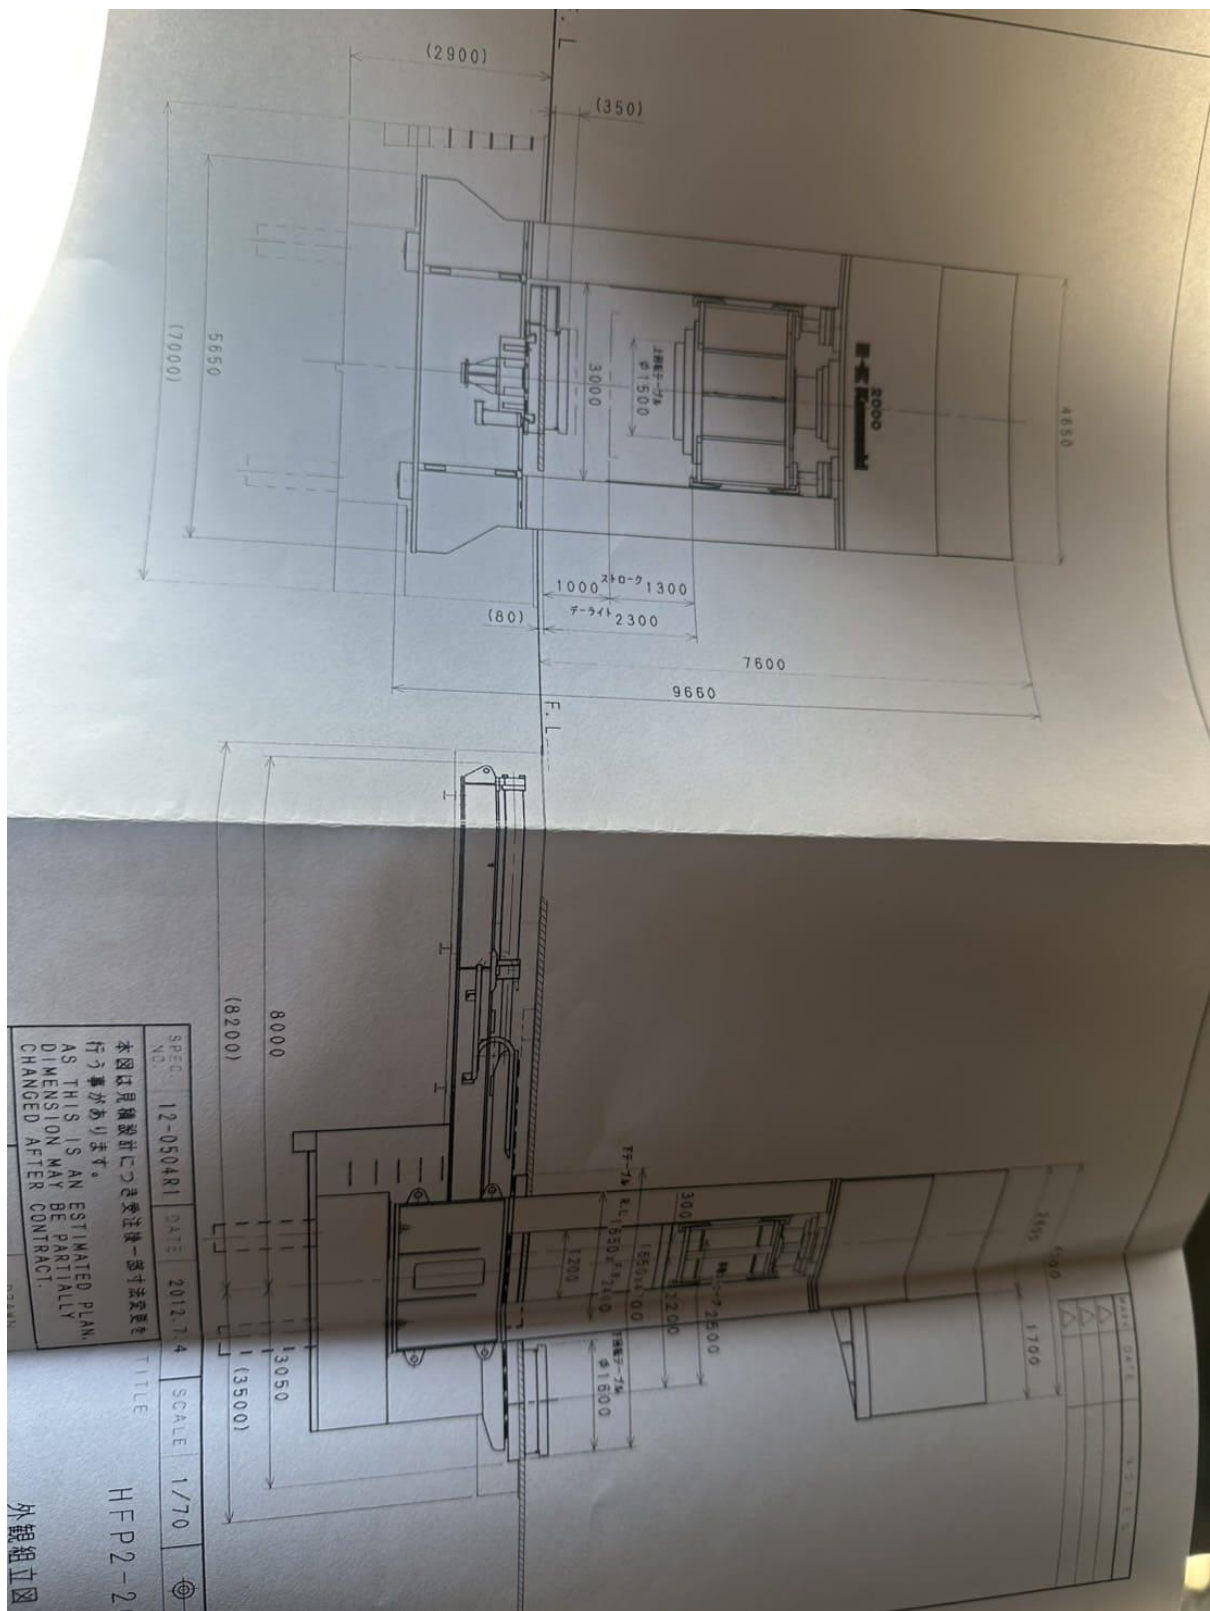

主要
レ
上
ベ
一
回
ス
ニ
一

