

Compressed Air Dryers

High Temperature Refrigerated Dryer



Dryer, Filter, and Drain in One Compact Package

Kaeser High Temperature Refrigerated Dryers (HTRD) are specifically designed for use with 5-25 hp piston compressors, although they will work well with any similar sized compressor producing high discharge temperatures. The HTRD contains an aftercooler, refrigeration unit, filtered separator, and drain to remove moisture and contaminants to a level suitable for most shop tools. This greatly increases tool life, reducing maintenance and downtime. For paint spraying applications, we strongly recommend also using a KOR model coalescing filter.

Easy to Install

The HTRD dryer features a compact design that requires little floor space and allows for convenient installation. Staggered inlet/outlet connections make piping easy. Simply make pipe connections and plug in the electrical cord to a 120V or 230V (depending on model), 1 phase outlet and the unit is ready for operation.

Easy to Use and Maintain

The dryer operates continuously without

Standard Features:

- Built to handle high inlet temperatures to 180°F
- Stainless steel, plate-type heat exchangers are compact, durable, and efficient
- Integral filter helps remove moisture, hydrocarbons, and solid particles
- Condensate drain automatically discharges liquid from dryer without air loss
- Automatic refrigeration temperature control system maintains precise chilled air temperature
- Hermetic refrigeration compressor requires no maintenance or adjustments
- Cool air exiting from the evaporator is reheated to save energy and prevent pipe sweating

All dryers are CSA certified, CFC free, and use environmentally friendly R407c refrigerant.

Five-year warranty on heat exchanger.

Two-year warranty on refrigeration system.


adjustments. Replacing the filter sleeve is simple and cleaning the refrigeration condenser filter and inlet strainer is easy to accomplish.

Technical Specifications

Model	Flow Rate* @ 175 psig (scfm)	Flow Rate* @ 150 psig (scfm)	Flow Rate* @ 125 psig (scfm)	Flow Rate* @ 100 psig (scfm)	Power Supply (V / Ph / Hz)	Inlet / Outlet Connection (in.)	Dimensions W x D x H (in.)	Weight (lb.)
HTRD 20	23	22	20	18	115 / 1 / 60	1/2	10 ¹ / ₈ x 12 ⁷ / ₈ x 28 ¹ / ₄	79
HTRD 25	29	27	25	23				80
HTRD 35	41	38	35	32				81
HTRD 50	58	54	50	45				150
HTRD 75	87	81	75	68				155
HTRD 100	116	108	100	91	230 / 1 / 60	1	16 ⁷ / ₈ x 16 ⁷ / ₈ x 45 ³ / ₄	187
HTRD 125	145	135	125	114				189

(*) **Rated capacity:** Based on compressed air at 180°F and saturated at 160°F, 50°F outlet pressure dew point and operation in a 95°F ambient.

- Maximum Inlet Temperature: 180°F
- Maximum / minimum ambient air temperature: 110/40°F
- Maximum allowable working pressure: 250 psig

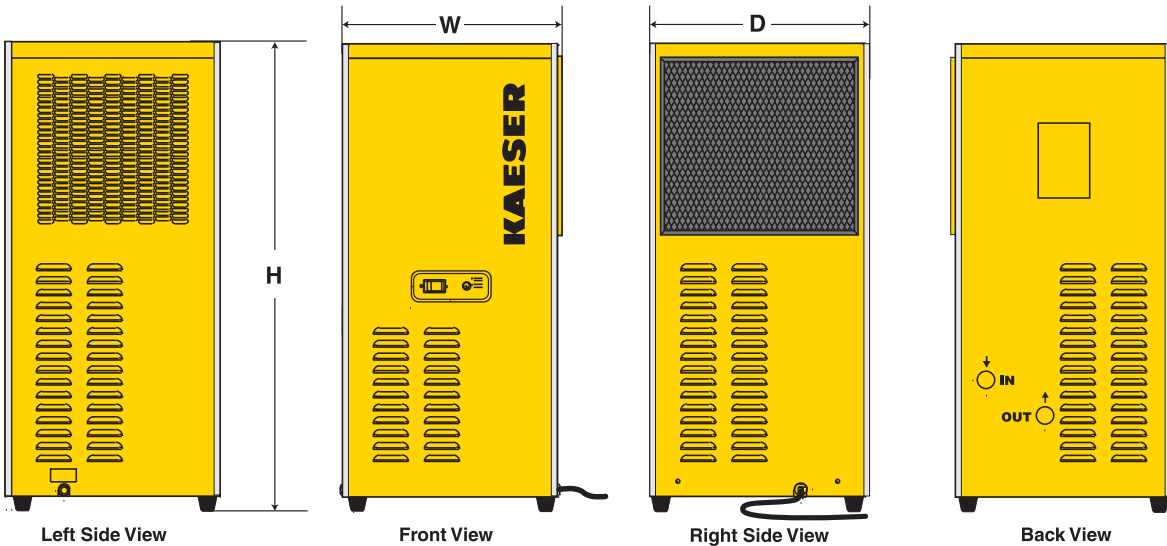

Specifications are subject to change without notice



Built for a lifetime.™

www.kaeser.com

Kaeser Compressors, Inc.
511 Sigma Drive
Fredericksburg, VA 22408 USA
Telephone: 540-898-5500
Toll Free: 800-777-7873
info.usa@kaeser.com

Kaeser Compressors Canada Inc.
3760 La Verendrye Street
Boisbriand, QC J7H 1R5 CANADA
Telephone: (450) 971-1414
Toll free: (800) 477-1416
info.canada@kaeser.com

Kaeser Compresores de México S de RL de CV
Calle 2 #123
Parque Industrial Jurídica
76100 Querétaro, Qro.
Telephone: 01 (442) 218 64 48
sales.mexico@kaeser.com

Kaeser Compresores de Guatemala y Cia. Ltda.
Calz. Atanasio Tzul 21-00, zona 12
El Cortijo II, Bodega 501
01012-Guatemala City
Telephone: +502 2412-6000
info.guatemala@kaeser.com

Certified Management Systems

